





Display
The keypad has a bright two-line liquid crystal display (LCD). It uses words, numbers, and symbols to show the status of the security system. When several events occur, the keypad shows each event in order of priority.

Status indicators
The Status indicators provide a quick visual reference for you to see how your system is operating.

Part On status 
Green - Ready to turn Part On (part arm). Red - Part On (part armed).

Power 
Blue - AC power present.

Trouble 
Yellow - A Trouble condition exists.

All On status 
Green - Ready to turn All On (arm). Red - All On (armed).


Navigation and Function keys
Pressing these keys turns on keypad backlighting and sounds the keypress tone (short beep).

PREV (▲) and NEXT (▼)
Use [PREV] (previous) and [NEXT] to scroll through lists and text.

ENTER (—)
Use [ENTER] to complete the entry of your passcode, to select a menu item, or to answer Yes to a keypad request.

ESC (★)
Use [ESC] (escape) to exit from menus and functions, or to backspace when entering names and numbers.

CMD (#)
Use [CMD] (command) in combination with one or two number keys to perform select functions.

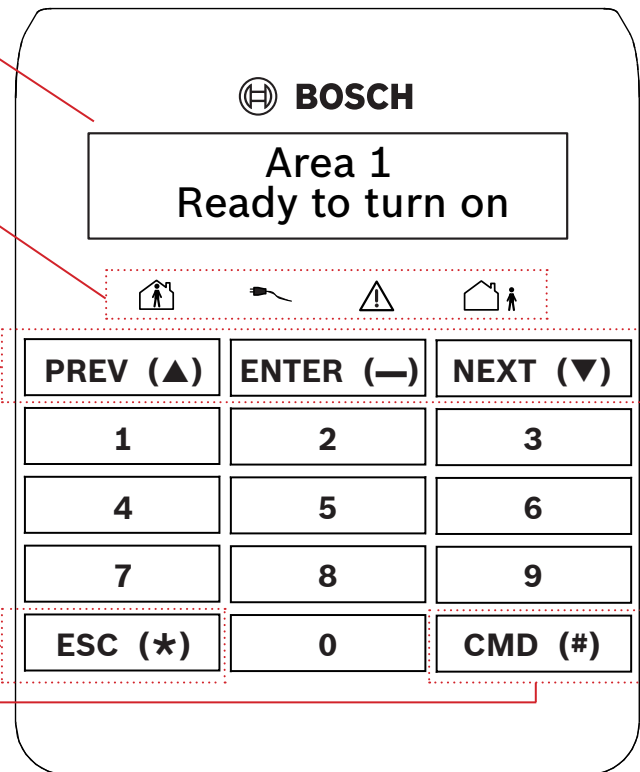

Commands

Command	Function
[CMD] 0	Bypass
[CMD] 0 0	Unbypass
[CMD] 1	All on (with delay)
[CMD] 1 1	All On, Instant
[CMD] 2	Part On, Instant
[CMD] 3	Part On (with delay)
[CMD] 4	Silence Trouble Sounders
[CMD] 4 0	See Alarms
[CMD] 4 1	Test Report
[CMD] 4 2	Status Report
[CMD] 4 3	RPS Answer
[CMD] 4 4	Intrusion Walk Test
[CMD] 4 5	Date and Time
[CMD] 4 6	Door Control Menu
[CMD] 4 7	Reset Sensors

Command	Function
[CMD] 4 9	Change Display
[CMD] 5 0	Go to Area
[CMD] 5 1	Extend Close
[CMD] 5 2	SKED Menu
[CMD] 5 3	Delete User
[CMD] 5 4	Output Change Menu
[CMD] 5 5	Change Passcode
[CMD] 5 6	Add User
[CMD] 5 7	Default Text
[CMD] 5 8	Fire Walk Test
[CMD] 5 9	Show Revision
[CMD] 6	Watch Mode
[CMD] 7*	Special Alert _____
[CMD] 8	Open Main Menu
[CMD] 9*	Special Alert _____

You can initiate functions with the [CMD] key plus a one or two digit command.


Press the [CMD] key and then enter the command.

- or -
After you press [CMD], use [PREV] and [NEXT] to move through the list of commands. Press [ENTER] when viewing the command to activate it.

Use [CMD]8 to open the Main menu.

Menu tree

The keypad offers an easy-to-use menu tree structure. To access the menu tree, press [CMD][8]. Each menu option has a number. At each level, you can press the number for the desired menu, if you know it. Otherwise, use [PREV] or [NEXT] to review your options at that level, and then press [ENTER] when you see the desired menu option. The menu tree figure shows the menu structure and the numbers associated for each menu option.

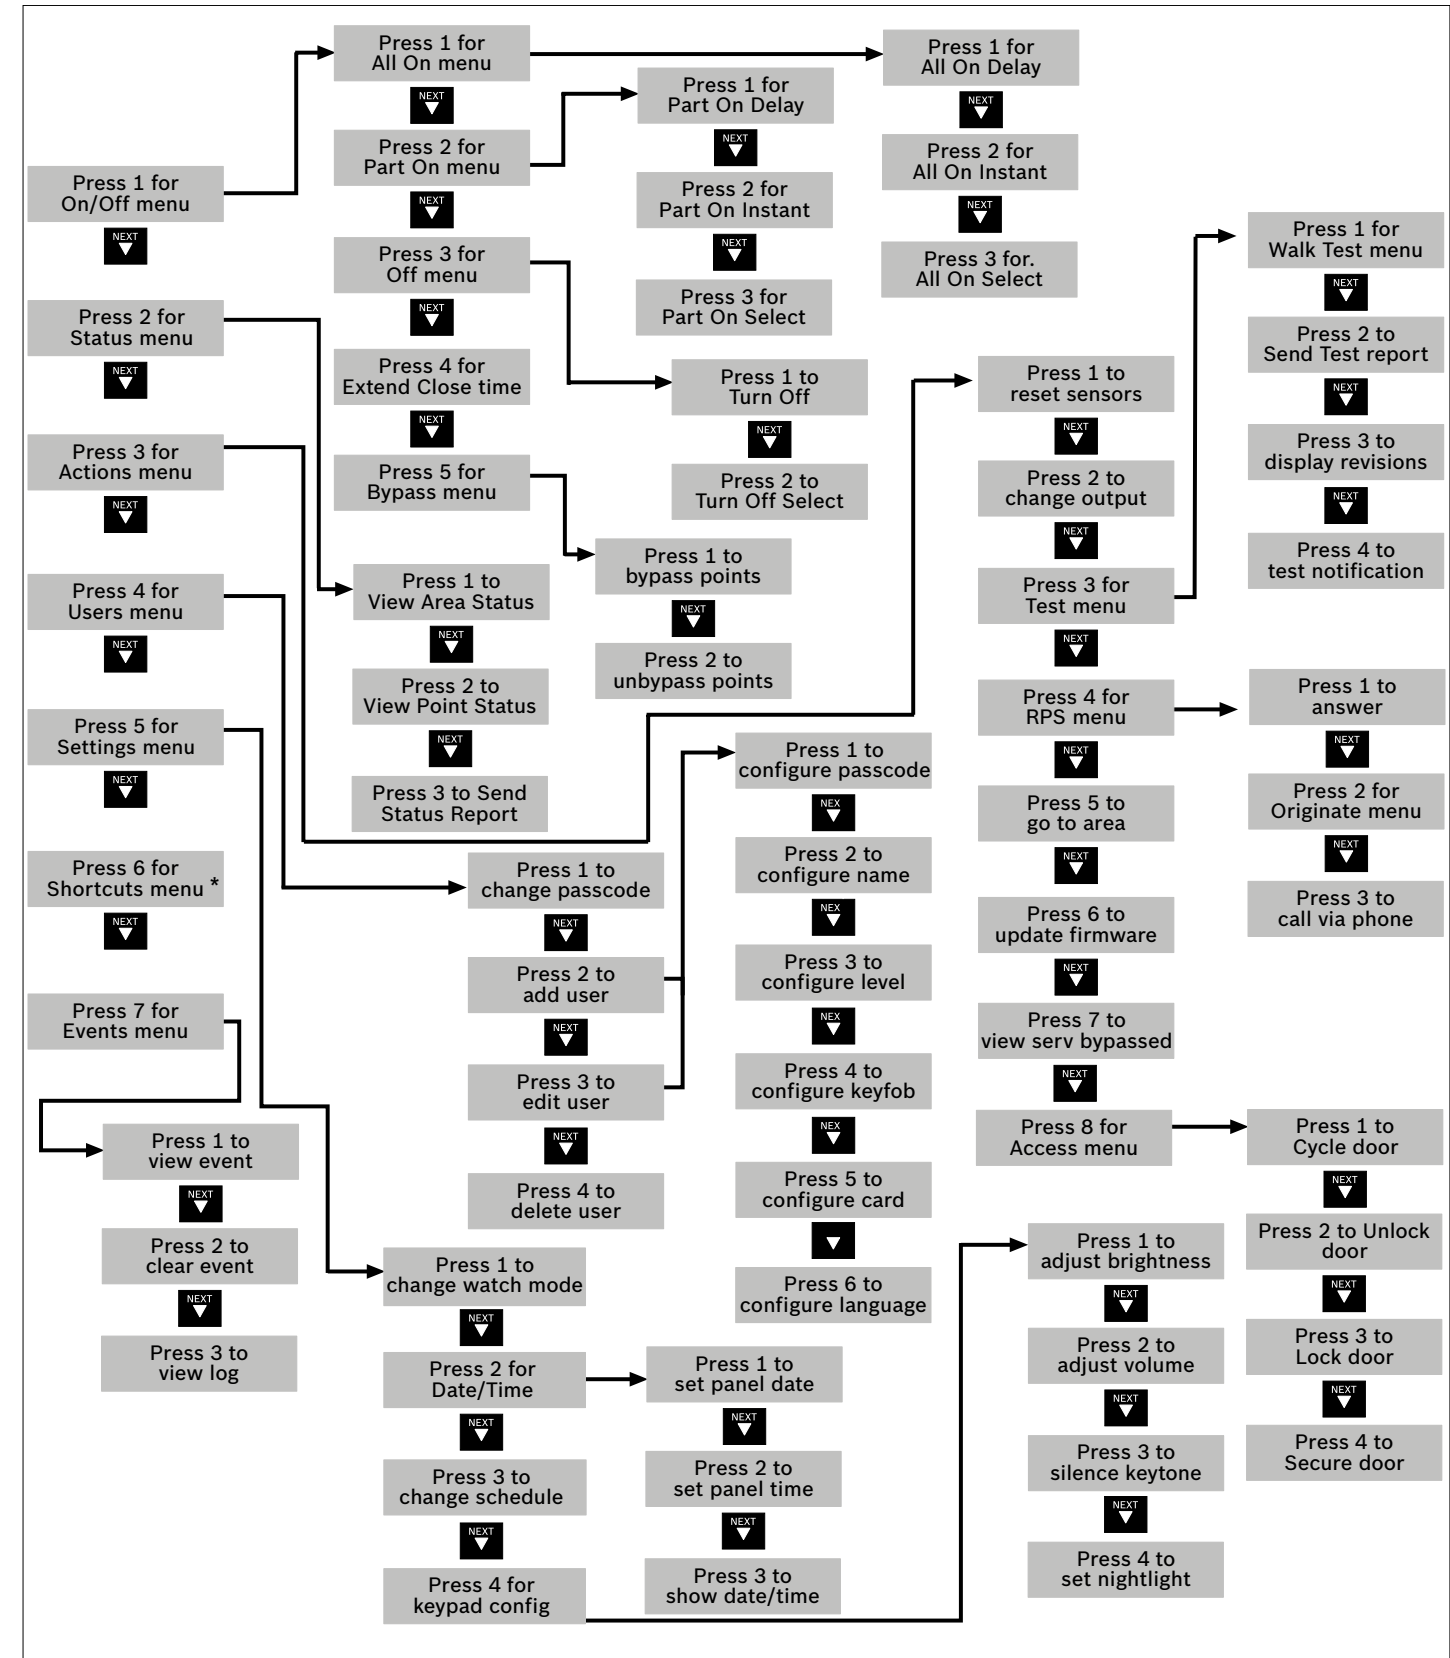

*As configured by your security company. NOTICE! The Access menu and the option to configure a card are available on compatible security systems only.

2 | Turn on (arm) your system

You can turn on (arm) your system using different methods.

Use one of the following:

Enter your passcode and press [ENTER] to turn All On with a delay.

_____ or _____

Use one of the available commands:

For All On: [CMD][1]

For All On, Instant: [CMD][1][1]

For Part On, Instant: [CMD][2]

For Part On: [CMD][3]

_____ or _____

Use the menus. Begin by pressing [CMD][8] to open the Main menu.

For All On: Go to [1] On/Off > [1] All On > [1] All On Delay.

For All On, Instant: Go to [1] On/Off > [1] All On > [2] All On Instant.

For Part On: Go to [1] On/Off > [2] Part On > [1] Part On Delay

For Part On, Instant: Go to [1] On/Off > [2] Part On > [2] Part On Instant.

The menu options allow you to choose individual areas to turn on. Open the All On or Part On menu, press [3] to open the Select menu, and then use [NEXT] and [ENTER] to choose On Instant or On Delay and the area to turn on.

3 | Turn off (disarm) your system

You can turn off (disarm) your system using different methods.

Do one of the following:

Enter your passcode.

_____ or _____

Use the menus. Begin by pressing [CMD][8] to open the Main menu.

For Turn Off: Go to [1] On/Off > [3] Off > [1] Off.

For Turn Off Select: Go to [1] On/Off > [3] Off > [2] Off Select. Then use [NEXT] and [ENTER] to choose the area to turn off.

4 | Change your passcode

You can change your own passcode using either method below. Refer to *Edit Users* to change passcodes for other users.

Use the command:

[CMD][5][5], and then follow the prompts.

_____ or _____

Press [CMD][8] to open the Main menu.

Go to [4] Users > [1] Change Passcode, and then follow the prompts.

5 | Edit users

You can change passcodes and add, remove, and replace keyfobs and cards* for users.

*Cards are supported by some security systems. If your security system supports cards, the menu option is available.

5.1 | Add users

Use the command or the menu to open the Add User option, and then follow the prompts to configure the user's passcode, name, authority level, keyfob (if desired), language (when applicable), and card (when applicable).

Use the command:

[CMD][5][6]

_____ or _____

Use the menus:

Press [CMD][8] to open the Main menu.

Go to [4] Users > [2] Add User.

5.2 | Edit Users

Use the menu to open the Edit User option, and then follow the prompts to configure the user's passcode, name, authority level, keyfob (if desired), language (when applicable), and card (when applicable).

Use the menus:

Press [CMD][8] to open the Main menu.

Go to [4] Users > [3] Edit User.

5.3 | Delete users

Use the command or the menu to open the Delete User option, and then follow the prompts to delete the user.

Use the command:

[CMD][5][3]

_____ or _____

Use the menus:

Press [CMD][8] to open the Main menu.

Go to [4] Users > [4] Delete User.

6 | Alarms

When the security system is in alarm, the number of alarms shows on the display.

Enter your passcode to silence alarms. If the system is on (armed), silencing the alarm also turns the system off. The system shows Alarm Silenced, and the number of points in alarm and the names of all the points in alarm, in the order of when they occurred.

7 | Shortcuts

You can access shortcuts through the menu:

Begin by pressing [CMD][8] to open the Main menu.

Go to [6] Shortcuts and then use [NEXT] and [ENTER] to choose the shortcut to run.

8 | Keypad cleaning

Use a soft cloth and non-abrasive cleaning solution to clean your keypad (for example, microfiber cloth and eyeglass cleaner). Spray the cleaner onto the cloth. Do not spray cleaners directly onto the keypad.

Copyright

This document is the intellectual property of Bosch Security Systems, Inc. and is protected by copyright. All rights reserved.

Trademarks

All hardware and software product names used in this document are likely to be registered trademarks and must be treated accordingly.



Basic Keypad B915/B915I



en User's Quick Reference Guide

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, NY 14450
USA
www.boschsecurity.com

Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany

