


Main Features

- > **Auto Gain Control (AGC)**
Built-in auto gain control (AGC) circuit. The color camera Can get high definition picture in low Lux condition.
- > **Auto Electronic Shutter (AES)**
Built-in auto electronic shutter function. The color camera's AES speed can reach 1/100,000s
- > **Scanning Mode**
NTSC or PAL mode.
- > **Signal Switch**
CVI MODE: hold up key 5s.
TVI MODE : hold down key 5s.
CVBS MODE : hold left key 5s.
AHD MODE : hold right key 5s.
Press towards desired video technology for 5 sec. within 10 sec. of connecting power.

> Menu

| | |
|-----------|--|
| Lens | MANUAL / AUTO |
| EXPOSURE | SHUTTER / AGC / SENS-UP / BRIGHTNESS / D-WDR / DEFOG |
| BACKLIGHT | OFF / BLC / HSBLG |
| WHITE BAL | ATW |
| DAY&NIGHT | D → N / N → D / RETURN |
| NR | 2DNR / 3DNR / RETURN |
| SPECIAL | CAM TITLE / D-EFFECT / MOTION / PRIVACY / LANGUAGE / DEFECT / RS485 / RETURN |
| ADJUST | SHARPNESS / MONITOR / LSC / VIDEO OUT / RETURN |
| EXIT | SAVE / CANCEL |

Device connection

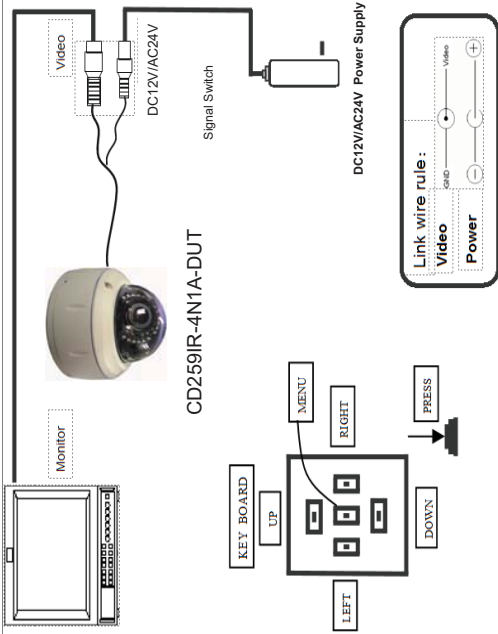

Safety instruction

1. Before using the camera, please read this manual carefully and keep it safely for later use.
2. Installation should be proceed by professional service and follow manufacturer's instructions, do not dismantle without authorization.
3. In order to prevent sensor, do not expose lens to intense light source in long time.
4. Do not touch sensor directly. Please covers the dustproof cover when the camera is not being used.
5. Please use a dry soft cloth to clean the camera. If dirt difficult to clean, use detergent with water and wipe dry the camera.
6. Do not install camera under air conditioning's air gate, or else lens blur with condensation of moisture.
7. Please ensure that all electric power sources are turned off when not open, installation, clean, etc operation.
8. Please transporting, using and storing the camera in allowable temperature and humidity.
9. If the camera was broken, for example power cord or plug damaged, Splash liquid or foreign matter fall into camera, raining, wetting, etc can't work situation, please contact manufacturer or maintenance center (modify and maintenance without permission, you must be responsible for the problems).

Common Problems and Troubleshooting

- > **No Picture after providing power**
May be the power supply voltage abnormality, please check the power supply voltage and pole whether exactitude. Please check all the connecting cable and monitors whether be connected correctly or not.
- > **The picture level direction have flowing interference ripples**
May be caused by the power supply AC ripples, it need filter the wave of the power supply.
Check the monitor and peripheral equipments used.
- > **The picture background color changes continuously**
The fluorescent lamp's electromagnetic field cause color roll. This is proper phenomenon of the cameras.
Reduce the fluorescent lamp numbers or increase the distance between the camera and the fluorescent lamps can improve it.
Use power supply external sync. camera can solve it.
- > **The picture smear too mass**
The power supply's voltage unstable.
Connecting cables not connect correctly or have high impedance.

Note:

- Please note the camera's operating temperature and its using environment requirement. Avoid using the camera at too high or too low temperatures. The operating temperature is -30~+60°C. (Recommendatory operating temperature is -10~+50°C.)
- Do not mount the camera near by the radiator or heater.

Specification

| | |
|----------------------|---|
| Model | CD259STA-4N1S-D |
| Image Sensor | 1/2.8" SONY IMX2441+291 2.1MP |
| Resolution | 1080P |
| Signal System | PAL / NTSC |
| Minimum Illumination | 0.01 Lux/F1.2 |
| S/N Ratio | More than 52dB |
| Synchronous System | Internal |
| IR Distance | 20 Meters (with 12μ x 30PCS Infrared LED) |
| IR Power On | Photodiode AUTO Control |
| Video Output | CVBS / CVI / TVI / AHD |
| Power/Current | DC12V / AC24V (+/-10%)/800mA |
| Lens | 2.5-10mm Manual Zoom Lens |
| Weather Proof | IP66 |
| Dimension (mm) | φ 150 x 127(H) |
| Weight (g) | 1092 |
| Operating Conditions | -10--+50°C RH95% MAX |

Accessories list

| Name | Number |
|------------|--------|
| Camera | 1 |
| User Guide | 1 |

CD259STA-4N1S-D 4 in 1 SONY Starvis Weatherproof Vandalproof Varifocal Camera



Thank you for using our product.
Before providing power for the camera, please read
this manual carefully before use.

We adopt the latest technical of sensor and driver.
It owns the characters of high definition and stability,
strong anti-jamming, rich and real color. Fixing and
using this model are convenient too. It is very good
for you to apply to your CCTV system.

Notes:

Do not attempt to disassemble the camera. If the camera
can not work, please contact local franchiser or our company.