

15" Sun Readable Monitor - Open Frame




WDL-1500SRF

MAIN FEATURES

- Active Screen Size - 15.0" Diagonal
- Bright Picture Display - 1,500 cd/m²
- 16,777,216 Colors, 6Bit
- Viewing Angle - Up:45 , Down: 55 , Left: 65 , Right: 65
- Inputs: D-SUB, Video In(CVBS), S-Video, IR Receiver(Optional)
- Achieves the highest image quality through digital display technology
- Reliable & solid product design
- Standardized mounting solution for various types of industrial machines
- Choose functions for applications from Analog RGB and Video

WDL-150SRF (15" Sun Readable Monitor - Open Frame)

DIMENSIONS

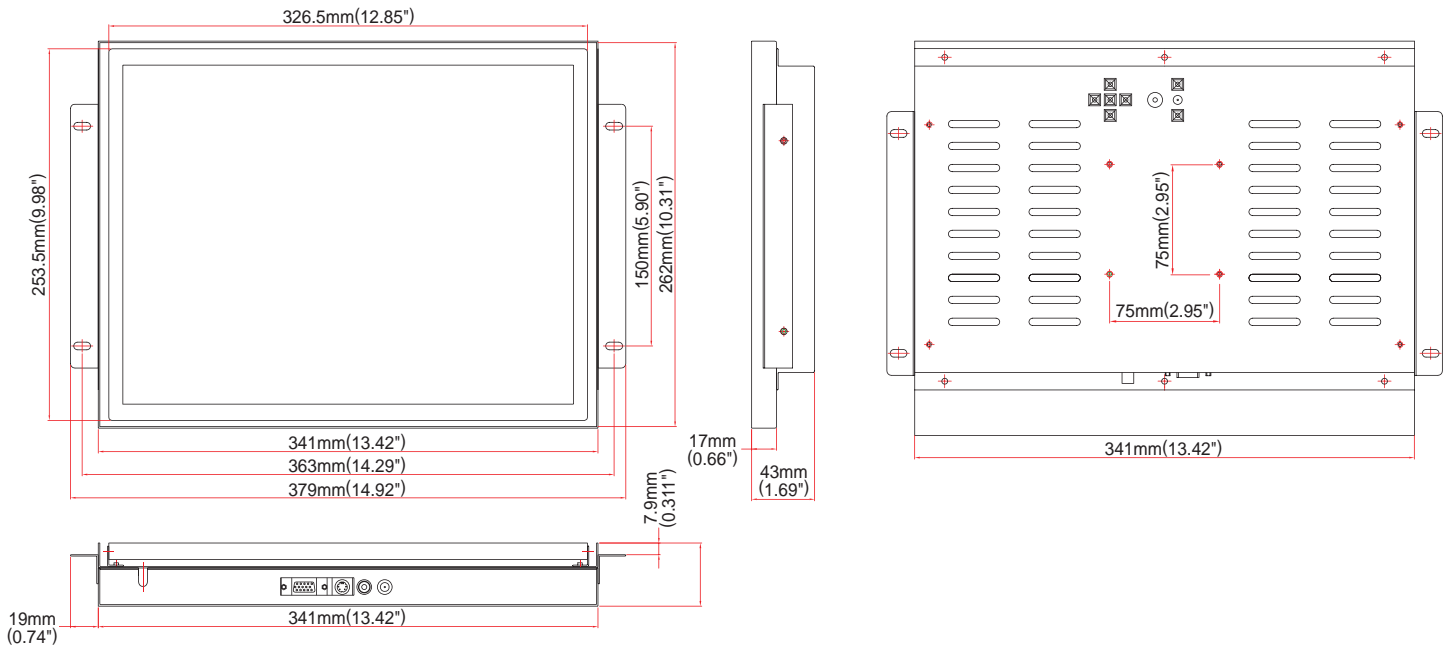

SPECIFICATIONS

Display	Screen Size	15" (Diagonal)
	Brightness	1,500cd/m ²
	Contrast Ratio	400:1
	Max Resolution	1024(H) x 768(V)
	Colors	16,777,216 Colors
	Viewing Angle	Up:45 , Down: 55 , Left: 65 , Right: 65
System	Compatibility	PC : VESA Standard VGA to SXGA 75Hz Video: NTSC, PAL, SECAM (Auto Detection)
Frequency		Horizontal: 31.5 ~ 37.5 KHz / Vertical : 56 ~ 75 Hz
Input	Input Signals	Analog RGB, CVBS, S-Video
	Input Connectors	D-SUB for RGB, RCA for CVBS, Mini Din for S-Video, IR Receiver (Optional)
OSD Controls		Auto Adjust, Brightness & Contrast, Size & Position, Color Control, Language Selection, OSD Position, Video Control, Input Selection
Plug & Play Support		DDC 1/2B
Power	Power Management	VESA DPMS
	Power Consumption	Normal Mode : 25 watts(Max) DPMS Mode : < 4 watts
	Power Supply	Input : AC 100 ~ 240V, 50 ~ 60Hz Output : DC12V, 3.3A
Environments	Temperature	Operating: 0 C~50 C(32 F~122 F) , Storage: -20 C~60 C(-4 F~140 F)
	Humidity	Operating: 30%~60%, Storage: -5%~70%
Dimensions (WxHxD)		341 x 262 x 43 mm (13.42 x 10.31 x 1.69 inch)