


Securitytronix Camera Power Supplies

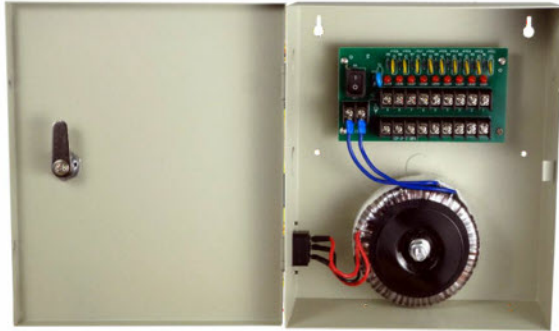


Features:

- 9 Camera outputs
- Input Voltage: 110VAC, 50-60Hz
- Input connector: IEC 3-pin AC Cord
- Output Voltage: 24VAC
- Output Current: 5A
- 9 Individual PTC fuses for protection against over-voltage/over-current
- 9 Individual status LEDs
- Each output is limited to 1.1A Max.
- Package includes: 1 Power supply, power cord, instruction manual, 2 keys, wall mounting hardware
- CE, FCC, RoHs
- Dimensions: 8.25"W x 9.75"H x 3.5"D
- Weight: 6.9 lbs.

Ordering Information:

ST-PBX9/24AC-PTC Camera power supply, 9 Outputs, 24VAC, 5A

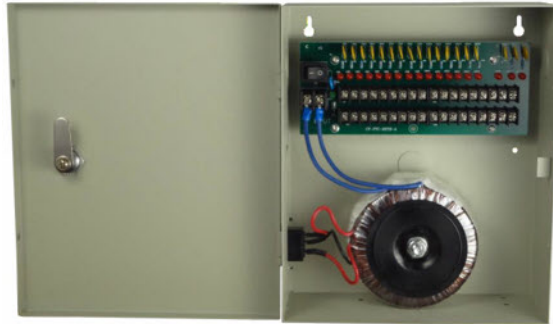

Features:

- 18 Camera outputs
- Input Voltage: 110VAC, 50-60Hz
- Input connector: IEC 3-pin AC Cord
- Output Voltage: 24VAC
- Output Current: 10A
- 18 Individual PTC fuses for protection against over-voltage/over-current
- 18 Individual status LEDs
- Each output is limited to 1.1A Max.
- Package includes: 1 Power supply, power cord, instruction manual, 2 keys, wall mounting hardware
- CE, FCC, RoHs
- Dimensions: 8.25"W x 9.75"H x 3.5"D
- Weight: 8.6 lbs.

Ordering Information:

ST-PBX18/24AC-PTC Camera power supply, 18 Outputs, 24VAC, 10A



Features:

- 4 Camera outputs
- Input Voltage: AC 110VAC - 220VAC, 50-60Hz
- Input connector: IEC 3-pin AC Cord
- Output Voltage: 12VDC
- Output Current: 5A
- Single 6A PTC fuse for protection against over-voltage/over-current
- Package includes: 1 Power supply, power cord, instruction manual
- CE, FCC, UL, RoHs
- Dimensions: 6"W x 2.2"H x 1.4"D
- Weight: 9.0 oz.

Ordering Information:

ST-PS12V5A-PTC Camera power supply, 4 Outputs, 12VDC, 5A

Securitytronix Camera Power Supplies




Features:

- 4 Camera outputs
- Input Voltage: 110VAC - 220VAC, 50-60Hz
- Input connector: IEC 3-pin AC Cord
- Output Voltage: 12VDC
- Output Current: 5A
- 4 Individual fuses for protection against over-voltage/over-current
- 4 Individual status LEDs
- Each output is limited to 1.1A Max.
- Package includes: 1 Power supply, power cord, instruction manual, 2 keys, wall mounting hardware
- CE, FCC, RoHs
- Dimensions: 8.25"H x 9.75"W x 3.5"D
- Weight: 4.95 lbs.

Ordering Information:

ST-PBX4/5A-PTC Camera power supply, 4 Outputs, 12VDC, 5A

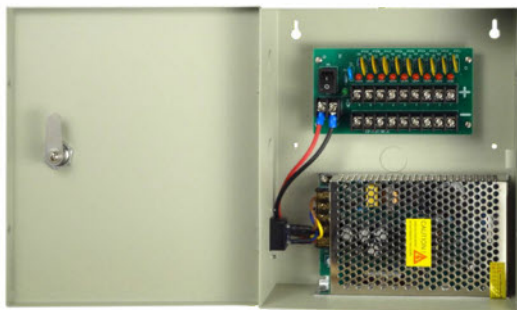


Features:

- 9 Camera outputs
- Input Voltage: 110VAC - 220VAC, 50-60Hz
- Input connector: IEC 3-pin AC Cord
- Output Voltage: 12VDC
- Output Current: 10A
- 9 Individual fuses for protection against over-voltage/over-current
- 9 Individual status LEDs
- Each output is limited to 1.1A Max.
- Package includes: 1 Power supply, power cord, instruction manual, 2 keys, wall mounting hardware
- CE, FCC, RoHs
- Dimensions: 8.25"H x 9.75"W x 3.5"D
- Weight: 4.95 lbs.

Ordering Information:

ST-PBX9/10A-PTC Camera power supply, 9 Outputs, 12VDC, 10A

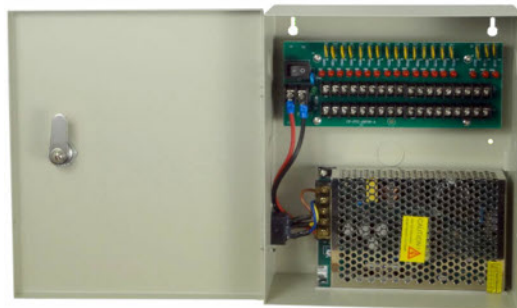


Features:

- 18 Camera outputs
- Input Voltage: 110VAC - 220VAC, 50-60Hz
- Input connector: IEC 3-pin AC Cord
- Output Voltage: 12VDC
- Output Current: 10A
- 18 Individual fuses for protection against over-voltage/over-current
- 18 Individual status LEDs
- Each output is limited to 1.1A Max.
- Package includes: 1 Power supply, power cord, instruction manual, 2 keys, wall mounting hardware
- CE, FCC, RoHs
- Dimensions: 8.25"H x 9.75"W x 3.5"D
- Weight: 4.95 lbs.

Ordering Information:

ST-PBX18/10A-PTC Camera power supply, 18 Outputs, 12VDC, 10A

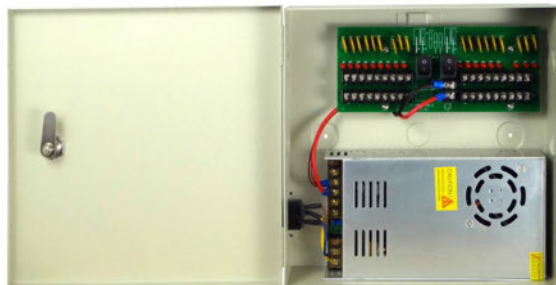

Features:

- 18 Camera outputs
- Input Voltage: 110VAC - 220VAC, 50-60Hz
- Input connector: IEC 3-pin AC Cord
- Output Voltage: 12VDC
- Output Current: 20A
- 18 Individual fuses for protection against over-voltage/over-current
- 18 Individual status LEDs
- Each output is limited to 1.1A Max.
- Package includes: 1 Power supply, power cord, instruction manual, wall mounting hardware, 2 Keys
- Certifications: CE, FCC, RoHs
- Dimensions: 10.5"H x 10.25"W x 3.25"D
- Weight: 6.8 lbs.

Ordering Information:

ST-PBX18/20A-PTC Camera power supply, 18 Outputs, 12VDC, 20A