

Plunger-Type Recessed-Mount Contact


SM-4301-TQ/W

Push-button, N.C., Quick-connect, White



Features:


- Used for protecting sliding doors and windows where space is limited
- Magnet and reed switch contained in housing
- Spacer and screws included
- Plunger travel is 1/4" (6mm)
- Screw terminals
- Contact reed switch is SPST, iridium-plated to have a high melting point and Vickers hardness, which results in higher handling power and long life
- For N.C. circuits
- Lifetime limited warranty



Specifications:

Circuit type	N.C.
Switch type	Plunger
Switch travel	1/4" (6mm)
Color	White
Material	High-impact ABS plastic
Contacts	Iridium-plated
Contact rating	0.1A@100VDC (max)
	1.0A@10VDC (max)
	10W (max)
Temperature	-15°~160°F (-25°~70°C)
Switch cycles	50 Million (0.1mA@5VDC)
Dimensions	1 5/32"x3/4"x1/4" (37x19x6mm)
Magnet	Rare-earth neodymium

Dimensions:

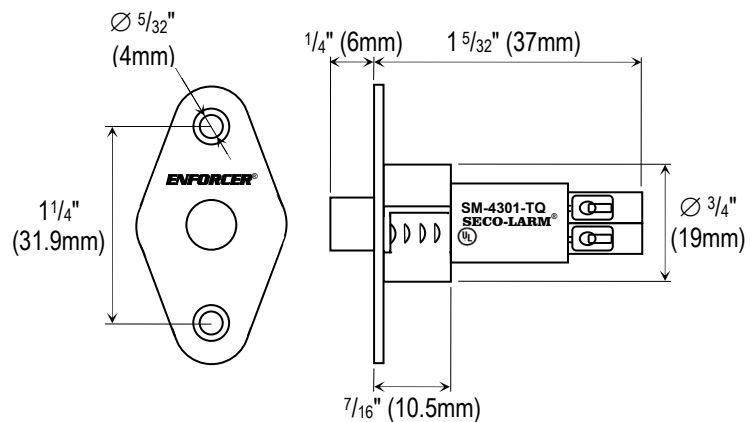

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2015 © SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI

PISM-4301-TQ_150526.docx