

ST-PS24VAC



CCTV Power Supply
24VAC, 1,660mA,
Screw Seizure
Connections

ST-BP0029



24VAC 40VA Power Adapter

- 24VAC, 40VA
- With lock on power outlet security screw



ST-PS12VDC5A-8PL

Eight Output CCTV Power Supply
12VDC, 5A, 8 Male Connectors

ST-0004/S

12VDC 500mA Switching Power Adapters

- Output 12V 500mA
- AC input supply voltage: 100 ~ 240V AC
- UL Listed



ST-0004/S1500

12VDC 1.5A (1500mA) Switching Power Adapters

- AC input supply voltage: 100 ~ 240V AC
- Output 12V 1.5A (1500mA)
- UL Listed



ST-PS12VDC1A

12VDC 1A (1,000mA) Regulated Power Adapter

- Output 12V 1000mA
- AC input: 100 ~ 240V AC
- UL Listed



ST-PS12VDC2A

12VDC 2A (2,000mA) Regulated Power Adapter

- Output 12V 2000mA
- AC input: 100 ~ 240V AC
- UL Listed



ST-PS36VDC1.5A

UL Approved Power Supply
36 VDC, 1.5A



ST-PS24VDC2.5A

UL Approved Power Supply
24 VDC, 2.5A



ST-PS18VDC3A

UL Approved Power Supply
18 VDC, 3A

AC Input Power: AC 24V
 DC Input Power: DC 18V - 48V
 Output Power: DC 12V
 Output Current: 5A
 Total Power: 60W
 Output Ripple: <=100mV
 Thermal Protection: Yes
 Overcurrent Protection: Yes
 Short Circuit Protection: Yes

ST-VC24VAC-12DC

Voltage Converter 24VAC to 12VDC

The ST-VC24VAC-12DC is perfect for applications which require 24VAC power distribution due to long distances but with cameras that require a 12VDC power source. The ST-VC24VAC-12DC can also accept a DC power source from 18VDC to 48VDC and convert it to 12VDC.



ST-BP0029/12

24VAC to 12VDC Power Adapter
700 mA

ST-BP0008-12

12V Battery Connector With Pig Tail

- Power plug with pig tail cable
- O.D.: 5.5mm
- I.D.: 2.1mm



**Contact Our
 Technical Sales
 Department For
 CCTV Design
 Assistance**



ST-DC21

DC Power Connector
Male DC to 2 Conductor Screw
Seizure Block



ST-DC21F

DC Power Connector
Female DC to 2 Conductor Screw
Seizure Block



ST-DC21M

DC Power Connector
Male DC to 2 Conductor
Removable Screw Seizure Block



ST-PSCPM-PT

Male DC power supply connector, male power connector with 90cm, 24awg pigtail power cable



ST-PSCPFM-PT

Female DC power supply connector, female power connector with 90cm, 24awg pigtail power cable

ST-GLI-UTP Twisted Pair Ground Loop Isolator

- BNC male to terminal block
- Low video loss
- Passive operation, no power needed
- Bandwidth: 20Hz to 11MHz, +0/-3dB
- Prevents video signal distortion caused by video ground loops
- Eliminates picture tearing, cross talk and rolling
- Guards against power cables interfering with CCTV systems



ST-GLI-BNC/BNC CCTV Ground Loop Isolator

- BNC male to BNC female
- Built in video filter
- Prevents video-signal distortion caused by video ground loops
- Passive operation, no power required
- Eliminates picture tearing, cross talk and rolling
- Guards against power cables interfering with CCTV systems
- Built in TVS (Transient Voltage Suppressors) for surge protection
- Perfect for use with DVRs to reduce DVR interference



Securitytronix Camera Power Supplies



ST-PBX9AC24V5A

- 9 Camera outputs
- Input Voltage: AC110V, 50-60Hz
- Output Voltage: 24VAC
- Output Current: 5A
- 9 Individual PTC fuses for protection against over-voltage/over-current
- 9 Individual status LEDs
- Package includes: 1 Power supply, power cord, instruction manual, 2 keys, wall mounting hardware
- UL Listed
- Dimensions: 7.25"W x 8.5"H x 3"D



ST-PBX18AC24V8A


- 18 Camera outputs
- Input Voltage: AC110V, 50-60Hz
- Output Voltage: 24VAC
- Output Current: 8A
- 18 Individual PTC fuses for protection against over-voltage/over-current
- 18 Individual status LEDs
- Package includes: 1 Power supply, power cord, instruction manual, 2 keys, wall mounting hardware
- UL Listed
- Dimensions: 8.5"W x 8.5"H x 3"D



ST-PBX4DC12V3A

- 4 Camera outputs
- Input Voltage: AC110V, 50-60Hz
- Output Voltage: 12VDC
- Output Current: 3A
- 4 Individual fuses for protection against over-voltage/over-current
- 4 Individual status LEDs
- Package includes: 1 Power supply, power cord, instruction manual, 4 fuses, 2 keys, wall mounting hardware
- UL Listed
- Dimensions: 6.5"W x 6.5"H x 2.0"D

Securitytronix Camera Power Supplies

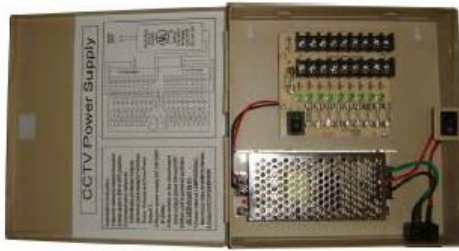

Features:

- 9 Camera outputs
- Input Voltage: AC 110V, 50-60Hz
- Output Voltage: 12VDC
- Output Current: 10A
- 9 Individual fuses for protection against over-voltage/over-current
- 9 Individual status LEDs
- Package includes: 1 Power supply, power cord, instruction manual, 4 replacement fuses, wall mounting hardware
- UL Listed
- Dimensions: 10.0"H x 8.3"W x 3.55"D
- Weight: 5.3 lbs.

Ordering Information:

ST-PBX9DC12V10A Camera power supply, 9 Outputs, 12VDC, 10A



Features:

- 9 Camera outputs
- Input Voltage: AC 110V, 50-60Hz
- Output Voltage: 12VDC
- Output Current: 5A
- 9 Individual fuses for protection against over-voltage/over-current
- 9 Individual status LEDs
- Package includes: 1 Power supply, power cord, instruction manual, 4 replacement fuses, wall mounting hardware
- UL Listed
- Dimensions: 10.0"H x 8.3"W x 3.55"D
- Weight: 5.0 lbs.

Ordering Information:

ST-PBX9DC12V5A Camera power supply, 9 Outputs, 12VDC, 5A



Features:

- 18 Camera outputs
- Input Voltage: AC 110V, 50-60Hz
- Output Voltage: 12VDC
- Output Current: 10A
- 18 Individual fuses for protection against over-voltage/over-current
- 18 Individual status LEDs
- Package includes: 1 Power supply, power cord, instruction manual, 4 replacement fuses, wall mounting hardware
- UL Listed
- Dimensions: 10.0"H x 8.3"W x 3.55"D
- Weight: 6.3 lbs.

Ordering Information:

ST-PBX18DC12V10A Camera power supply, 18 Outputs, 12VDC, 10A



Features:

- 18 Camera outputs
- Input Voltage: AC 110V, 50-60Hz
- Output Voltage: 12VDC
- Output Current: 5A
- 18 Individual fuses for protection against over-voltage/over-current
- 18 Individual status LEDs
- Package includes: 1 Power supply, power cord, instruction manual, 4 replacement fuses, wall mounting hardware
- UL Listed
- Dimensions: 10.0"H x 8.3"W x 3.55"D
- Weight: 4.85 lbs.

Ordering Information:

ST-PBX18DC12V5A Camera power supply, 18 Outputs, 12VDC, 5A