

Commercial Series TriTech+ Motion Detectors with Anti-mask

www.boschsecurity.com



BOSCH
Invented for life



- ▶ Active infrared anti-mask - Detects attempts to obscure the detector's field of view
- ▶ TriTech - Passive infrared and microwave Doppler radar detection with First Step Processing for superior catch performance and best-in-class false alarm immunity
- ▶ Microwave Noise Adaptive Processing - Avoids false alarms from repetitive sources
- ▶ Integrated EOL resistors - Reduces installation time and complexity
- ▶ Flexible mounting height, no adjustments - Reduces installation time and false alarms, improves catch performance

The Commercial Series TriTech+ motion detectors with anti-mask are designed to ensure reliable catch performance and false alarm immunity in commercial applications. Commercial Series motion detectors use a combination of passive infrared (PIR) and microwave Doppler radar detection technologies with advanced signal processing. New features such as integrated, selectable end-of-line resistors, a self-locking enclosure with integrated bubble level, and removable lift gate style terminal strip make installation of Commercial Series detectors easier and more reliable.

Functions

First Step Processing

First Step Processing (FSP) almost instantly responds to intruders without producing false alarms from other sources. FSP adjusts the detector's sensitivity based on signal amplitude, polarity, slope, and timing. The sensitivity level for the Commercial Series motion detectors with anti-mask is approximately 20% higher

than in the models without anti-mask, making them more suitable for higher security applications, such as banks, jewelry stores, pharmacies, and other applications.

Active infrared anti-mask technology

The detector utilizes two different techniques for detecting attempts to obscure the field of view of the detector; through-the-lens and bounce back.

Microwave Noise Adaptive Processing

Microwave Noise Adaptive Processing adjusts to background disturbances, reducing false alarms from repetitive sources without sacrificing intruder detection.

Integrated jumper selectable EOL resistors

The integrated EOL resistors simplify the wiring process and reduce installation time.

Flexible mounting heights

No adjustments required when mounted from 2.3 to 2.75m (7.5 to 9.0 ft). Reduce installation time and false alarms while improving catch performance.

Self-locking enclosure with removable terminal strip

The sliding, self-locking enclosure has an integrated bi-axial bubble level and custom gap-free, lift-gate style terminal strip to make installation easier and more reliable.

Dynamic temperature compensation

The detector intelligently adjusts its sensitivity so that it can identify human intruders at virtually any temperature.

Small animal immunity

The small animal immunity feature reduces false alarms from small animals up to 4.5 kg (10 lbs) that may move on the floor within the coverage area of the detector.

Protected, sealed optics and electronics

The optics and electronics are assembled into the front enclosure and sealed with a protective cover to prevent damage during installation. The sealed optical chamber also prevents drafts and insects from affecting the detector.

Test features

Externally visible alarm LED can be disabled after installation.

Switch configuration

The following functions are selectable using switches:

- Alarm LED On and Off
- PIR sensitivity
- Anti-mask On and Off

Wall-to-wall coverage

A user-selectable integrated lookdown zone and coverage range of 12 m to 15 m (40 ft to 50 ft), based on model chosen, provide wall-to-wall coverage.

Certifications and approvals

The following table lists regulatory approvals by region.

Region	Agency	Certification
Australia	ACMA	RCM
Europe	EN Standards	EN 50131-2-4 Grade 3 / Grade 2 EN 50130-5 Environmental Class II IP41 / IK04 (EN60529, EN 62262)
USA	UL	-WA15G: Intrusion Detection Unit Type: S -WA12G: Intrusion Detection Unit Type: S
	FCC	FCC Part 15 Class B
Canada	cUL	-WA15G: Intrusion Detection Unit Type: S -WA12G: Intrusion Detection Unit Type: S
	IC	1249A-CDL1

Region	Agency	Certification
France	AFNOR/ CNPP/ NFA2P	ISC-CDL1-WA15G Cert # 2800200014 NF&A2P Grade 3
		ISC-CDL1-WA15H Cert # 2830200012 RTC 50131-2-4 Grade 3
		NF-324-H58 – 110P2 AFNOR Certification: www.afnor.org CNPP Cert.: www.cnpp.com Sécurité contre la fraude: Autosurveillance à l'ouverture et à l'arrachement, Immunité champ magnétique, Anti-masque.
Region	Certification	
Australia	RCM	[-WA12G, W15G, WA15G]
Europe	CE	EMC, LVD, R&TTE, RoHS [-W15G, -W15H, -W15K, -WA15G, -WA15H, -WA15K]
Belgium	INCERT	B-509-0067 [-WA15G, -WA15H]
Sweden	SBSC	[-WA15G] Alarm Class 3/4, Environmental Class II (Larmklass 3/4 miljöklass II)
USA	UL	[-WA12G, -W15G, -WA15G]
	FCC	Part 15 Class B
Canada	ULC	[-WA12G, -W15G, -WA15G]
	IC	Industry Canada
France	AFNOR	[-WA15G]
	AFNOR	[-WA15H]


Installation/configuration notes**Mounting**

The recommended mounting height is 2.3 m to 2.75 m (7.5 ft to 9 ft) with no adjustments required.


The detector can be mounted:

- In a corner by utilizing the beveled edges of the detector base.
- On a flat wall by securing the detector base directly to the wall.
- On a flat wall using the optional B328 Gimbal-mount Bracket, or B335 Swivel-mount Bracket.
- On the ceiling with the optional B338 Ceiling-mount Bracket.

Coverage patterns

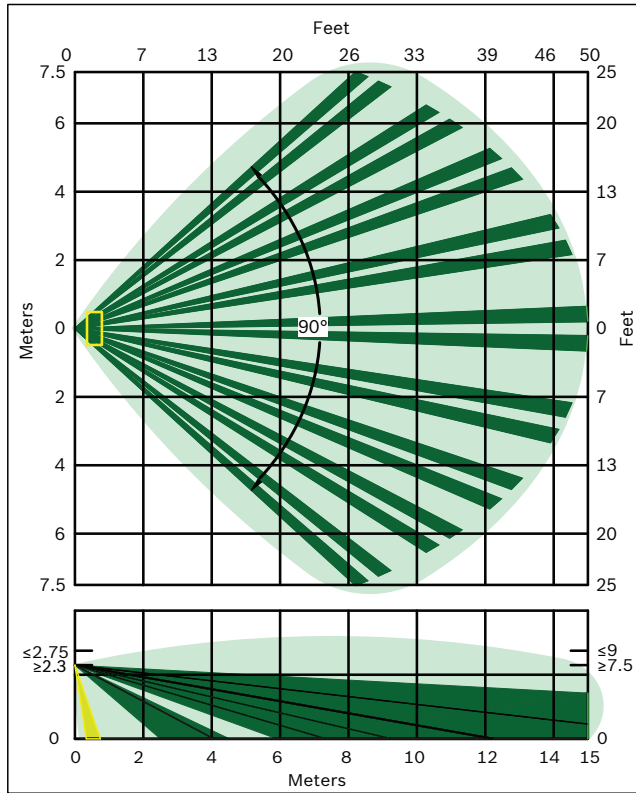

ISC-CDL1-WA15x 15 m x 15 m (50 ft x 50 ft) coverage

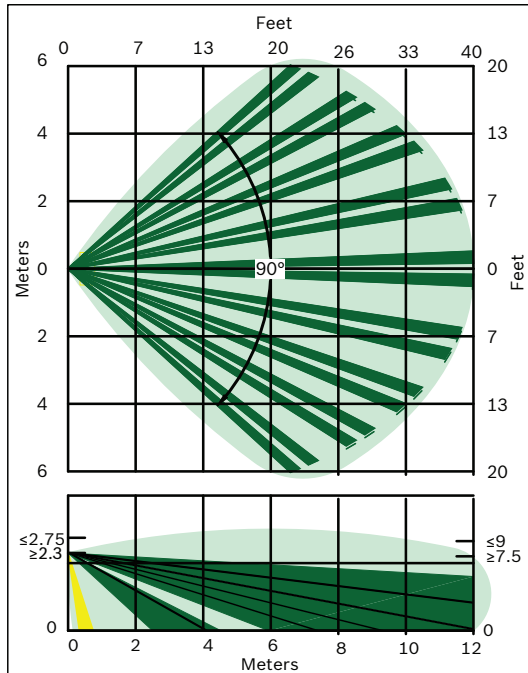

ISC-CDL1-WA12x 12 m x 12 m (40 ft x 40 ft) coverage

Parts included

Quantity	Component
1	Detector
1	Hardware pack <ul style="list-style-type: none"> • 4 jumpers • 2 anchors • 2 screws • 1 cable tie
1	Literature- Installation Guide

Technical specifications

Properties

Dimensions	120 mm x 70 mm x 55 mm (4.7 in. x 2.75 in. x 2.2 in.)
Material	High-impact ABS plastic
Color	White
Terminal wire size	Ø 0.40 mm to 1.29 mm (26 AWG to 16 AWG) (UL: 22 AWG to 16 AWG)

Environmental

Environment	Complies with EN50130-5 Environmental Class II
Relative humidity	93% non-condensing
Temperature (operating)	-30°C to +55°C (-22°F to +130°F) UL: 0°C to +49°C (+32°F to +120°F) AFNOR/CNPP: -10°C to +55°C

Electrical

Current (maximum)	35 mA
Voltage (operating)	9 VDC to 15 VDC
Radio Frequency Interference (RFI) Immunity	No alarm or setup on critical frequencies in the range from 150 kHz to 2.7 GHz at field strengths less than 10 V/m.

Outputs

Alarm relay, trouble relay	Solid state, supervised, normally-closed (NC) contacts rated for <100 mA, 25 V, 2.5W
Tamper	Supervised, normally-closed (NC) contacts rated for <100 mA, 25 V, 2.5W
End-of-line resistors	Alarm: 1.0 k, 2.2 k Tamper: 1.0 k, 2.2 k, 33 k Trouble: 2.2 k, 12 k

Ordering information

ISC-CDL1-WA15G Commercial Series TriTech+ Motion Detector with Anti-mask

Provides PIR and microwave Doppler radar detection, 15 m x 15 m (50 ft x 50 ft) coverage pattern, and anti-mask detection. Frequency: 10.525 GHz
Order number **ISC-CDL1-WA15G**

ISC-CDL1-WA15G-CHI Commercial Series TriTech+ Motion Detector with Anti-mask

Provides PIR and microwave Doppler radar detection, 15 m x 15 m (50 ft x 50 ft) coverage pattern, and anti-mask detection. Frequency: 10.525 GHz. For use in China.
Order number **ISC-CDL1-WA15G-CHI**

ISC-CDL1-WA15H Commercial Series TriTech+ Motion Detector with Anti-mask

Provides PIR and microwave Doppler radar detection, 15 m x 15 m (50 ft x 50 ft) coverage pattern, and anti-mask detection. Frequency: 10.588 GHz. For use in France and the United Kingdom.
Order number **ISC-CDL1-WA15H**

ISC-CDL1-WA15K Commercial Series TriTech+ Motion Detector with Anti-mask

Provides PIR and microwave Doppler radar detection, 15 m x 15 m (50 ft x 50 ft) coverage pattern, and anti-mask detection. Frequency: 9.350 GHz. For use in Germany, Austria, and Switzerland.
Order number **ISC-CDL1-WA15K**

ISC-CDL1-WA12G Commercial Series TriTech+ Motion Detector with Anti-mask

Provides PIR and microwave Doppler radar detection, 12 m x 12 m (40 ft x 40 ft) coverage pattern, and anti-mask detection. Frequency: 10.525 GHz
Order number **ISC-CDL1-WA12G**

ISC-CDL1-WA12G-CHI TriTech+ Motion Detector with Anti-mask

Provides PIR and microwave Doppler radar detection, 12 m x 12 m (40 ft x 40 ft) coverage pattern, and anti-mask detection. Frequency: 10.525 GHz. For use in China.
Order number **ISC-CDL1-WA12G-CHI**

ISC-CDL1-WA12H Commercial Series TriTech+ Motion Detector with Anti-mask

Provides PIR and microwave Doppler radar detection, 12 m x 12 m (40 ft x 40 ft) coverage pattern, and anti-mask detection. Frequency: 10.585 GHz
Order number **ISC-CDL1-WA12H**

Accessories

B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.
Order number **B328**

B335-3 Swiveling low-profile mount

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°. Order number **B335-3**

B338 Universal Ceiling-mount Bracket

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°. Order number **B338**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
203 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com