

DESCRIPTION

The Model TLSP Corner Mount is a two-way talk/listen speaker/microphone with built-in electret condenser microphone and a 3" speaker. Vandal resistant housing is especially designed for mounting in a corner or between wall and ceiling. When part of a Louroe Audio System, TLSP Corner Mount provides listen and talkback capabilities between the remote area and the Louroe Base Station.


APPLICATION

- Correctional Facilities
- Transportation Terminals
- Juvenile Facilities
- Public Access Areas
- Parking Structures
- Areas where vandalism is a concern

WIRING REQUIREMENTS

- 4 Conductor consisting of:
 - 2 Conductor **shielded**, 20 gauge with 22 gauge drain (microphone connection)
 - 2 Conductor **unshielded**, 18 gauge (speaker connection)
- All in the same jacket

West Penn 356 or equivalent

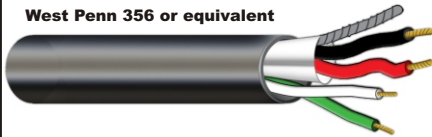

IMPORTANT NOTICE

When this equipment is used as part of an audio monitoring system, the law requires that the public be given notice of AUDIO MONITORING ON THE PREMISES. A decal notice is included with each microphone shipped.



Federal Law References:
Federal Regulations, US Code, Title 18.
Crime and Criminal Procedure, Sec.2510.



TLSP CORNER MOUNT

FEATURES

- Vandal resistant 18 gauge CRS housing
- Mounts in a corner or between wall and ceiling
- Face dimensions: 8 3/4 x 6"
- May be mounted up to 1,000 ft. from Louroe Base Station
- Phantom powered from the Louroe Base Station
- Microphone can pick up normal sounds 15' away or within a 30' dia. circle

SPECIFICATIONS (Microphone)

Type	Electret condenser
Output	Line Level (0 dB @ 1KΩ)
Output impedance (mic only)	600Ω unbalanced
Frequency response	40 Hz to 15 kHz ± 1 dB
Current drain	4 mA
Supply voltage	12 Vdc

SPECIFICATIONS (Speaker)

Power rating	2W
Input	70.7V constant
Frequency response	300 Hz to 4 kHz ± 1dB
Impedance	8Ω
Speaker size	3"
Weight (net)	3.0 Lbs (1.4 Kg)