


3MP Flexible Intensifier® Technology Bullet IP Camera

O3FB56M 5-60mm motorized lens, dark gray housing

Features

- Flexible Intensifier® Technology to fit any lighting application
- Long-range 5-60mm motorized lens with auto focus
- Supports up to 3MP @ 30fps
- Built-in standard PoE (IEEE 802.3af)
- Adaptive IR LEDs reduce IR saturation
- IR Range: 200' (depending on scene reflection)
- True WDR (wide dynamic range) operation
- 2-way audio communication
- Micro SD card slot for edge recording (card not included)
- Sensor input and relay output
- Built-in heater and anti-fog glass reduces condensation
- IP67 compliant, weather resistant
- Conformant with ONVIF Profile S
- 5 year warranty

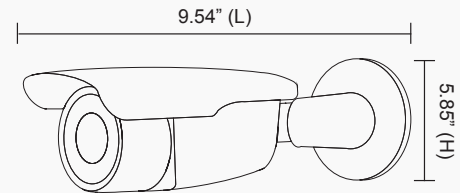

Camera Specifications

Image Sensor Progressive scan 1/2.8" CMOS, 3MP
 Maximum Resolution 2048 x 1536
 Minimum Illumination F1.4, 0.1 lux (color); 0 lux (IR LED on)
 White Balance ATW / AWB
 Compensation WDR
 Day / Night IR cut filter
 Intensify Selectable (max. 8x) / Off
 Electronic Shutter Speed 1/30 - 1/10000 sec
 DNR 2D / 3D

Video Specifications

Main Resolution 2048x1536 / 1920x1080 / 1280x720 @ 30fps
 Compression H.265 (MP/BP), H.264 (HP/MP/BP), MJPEG
 Bitrate Control VBR, CBR
 Multiple Streaming 3 streams

Audio Specifications

Mono Input G.711
 Mono Output G.711

External Terminal Specifications

Ethernet 10/100 Mbps
 Alarm 1 sensor input, 1 relay output
 Audio 1 mic in, 1 line out (RCA)
 Power DC jack
 Storage Micro SD slot

Network Specifications

Protocols IPv4, TCP, UDP, RTP, RTSP, HTTP, HTTPS, SMTP, FTP, DHCP, UPnP, DNS

Network Specifications (continued)

DDNS support Speco DDNS (free of charge)
 Security User ID & Password protection, IP address filtering, digest authentication
 User Access Max. 8 simultaneous users
 Actual number of users may vary depending on bandwidth

System Specifications

PoE Standard (IEEE 802.3af)
 Analytics Motion detection, tampering, sensor input
 Alarm Triggers Analytics
 Alarm Events FTP upload, email upload, micro SD card recording, relay output
 Image Settings Privacy mask

Client Specifications

Web Browser Support Windows (Internet Explorer 8 and up)
 PC Application SecureGuard® VMS
 Mobile Application SecureGuard® Mobile (iPhone® and Android™)

Operating & Unit Specifications

Power Supply PoE, 12VDC (power supply not included)
 Power Consumption 11W
 Operating Temperature -4° F – 122° F
 Operating Humidity 0% - 90% RH
 Unit Dimensions 3.98" (W) x 5.85" (H) x 9.54" (L)
 Unit Weight 3.4 lbs.
 Certifications FCC, RoHS

Optional Accessories



CVCJBD
Small Round
Junction Box



POEINJ
12.95W
PoE Injector



PSW5
12VDC
Power Supply

*Visit www.specotech.com for latest ONVIF support. ONVIF is a trademark of Onvif, Inc. iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google Inc. Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 1/25/17