



Product Data Sheet

1032W-N

Miniature flange mount magnetic contact

Flange mount Contact


The Sentrol 1032 series magnetic contacts saves installation time by using a flange to mount the contact. A low profile and small footprint combine with reliable Sentrol technology to make the 1032 series the perfect magnetic contact for those situations where limited mounting space is available.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.

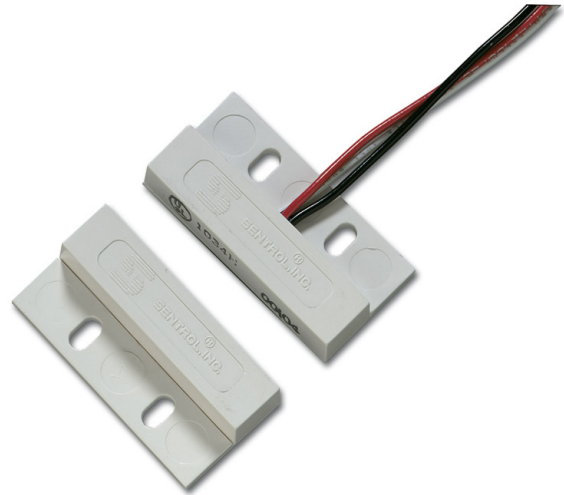

Standard Features


- Flanges for rapid mounting
- Convenient surface mounting
- Includes adhesive mounting strips
- Mounting screws

1032W-N

Miniature flange mount magnetic contact

Specifications

Gap distance (max)	25 mm
Connections	30 cm wire leads
Contact	NC
Supervised loop	No
Dimensions (L x W x H)	38 x 6 x 25 mm
Color	White

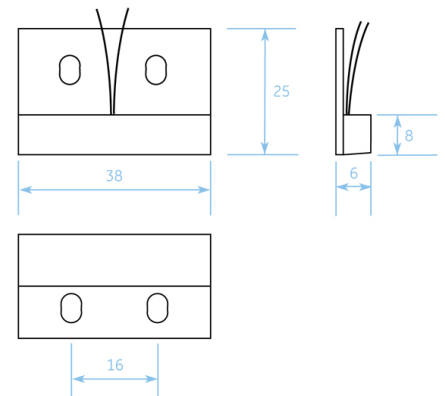

Ordering Information

Part No.	Description
1032W-N	Miniature flange mount magnetic contact, wide gap, white

