

CTP-TLV19NV



2 MEGAPIXEL IR VANDAL DOME CAMERA

IP
CAMERA




FUNCTION

- 1080P (1920 X 1080) FULL REAL TIME CODING
- MAXIMUM RESOLUTION: 1920 X 1080
- 2.8~12mm VARIFOCAL LENS
- H.264 / 30 IR LED
- ICR AUTO SWITCH, TRUE DAY & NIGHT
- 20 ~ 30m IR NIGHT VIEW DISTANCE
- 3D DNR, DIGITAL WDR
- SUPPORT CORRIDOR PATTERN
- ROI CODING
- POE (POWER OVER ETHERNET) POWER SUPPLY
- SUPPORT SMART PHONE, IPAD, REMOTE MONITORING
- SUPPORT P2P / TRIPLE STREAMS
- WATER PROOF (IP66)
- DC 12V / WHITE CASING



DIMENSION

* Unit : mm (Inch)

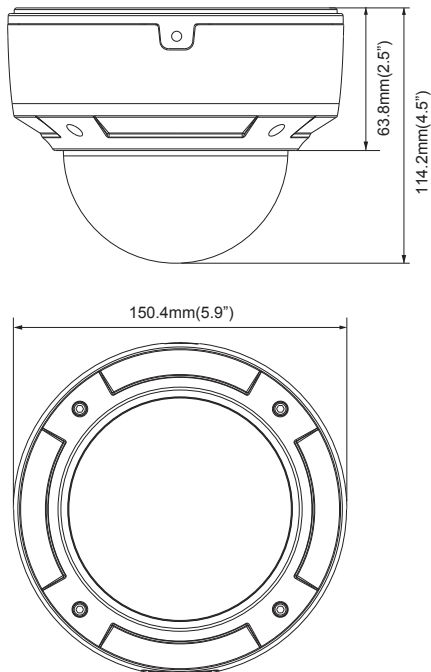

SPECIFICATION

DESCRIPTION	NTSC	PAL
IMAGE SENSOR	1 / 3 " CMOS	
IMAGE SIZE	1920 × 1080	
ELECTRONIC SHUTTER	1 / 25s ~ 1 / 100000s	
MIN. ILLUMINATION	0 LUX (IR LED ON)	
LENS	2.8 ~ 12mm VARIFOCAL LENS	
LENS MOUNT	CS / Ø14	
VIDEO COMPRESSION	H.264 / MJPEG	
RESOLUTION	1080P (1920 X 1080), 720P (1280 X 720), D1, CIF, 480 X 240	
MULTI-STREAM	1920 X 1080 (1 ~ 30FPS) / 1280 X 720 (1 ~ 30FPS) / 1280 X 720 (1 ~ 10FPS) / D1 (1 ~ 30FPS) / CIF (1 ~ 30FPS) CIF (1 ~ 30FPS) / 480 X 240 (1 ~ 30FPS)	
BIT RATE	64 Kbps ~ 8 Mbps	
ENCODE MODE	VBR / CBR	
QUALITY	FIVE LEVELS UNDER VBR; FREELY ADJUSTABLE UNDER CBR	
IMAGE SETTINGS	CORRIDOR PATTERN, SATURATION, BRIGHTNESS, CHROMA, CONTRAST, WIDE DYNAMIC, SHARPEN, NR, ETC. ADJUSTABLE THROUGH CLIENT SOFTWARE OR WEB BROWSER	
REMOTE MONITORING	IE BROWSING, CMS REMOTE CONTROL	
ONLINE CONNECTION	SUPPORT SIMULTANEOUS MONITORING FOR UP TO 6 USERS; SUPPORT MULTI-STREAM REAL TIME TRANSMISSION	
PROTOCOL	TCP / IP, UDP, DHCP, NTP, RTPS, PPPOE, DDNS, PROTOCOL SMTP, FTP	
STORAGE	NETWORK REMOTE STORAGE	
SMART ALARM	MOTION ALARM	
DAY & NIGHT	ICR	
POE	YES	
IR DISTANCE	20 ~ 30m	
WATER-PROOF	IP66	
NETWORK	RJ45	
AUDIO	NO	
STORAGE CARD	SUPPORT TF CARD, THE MAX CAPACITY IS 64GB	
POWER SUPPLY	DC 12V / POE	
POWER CONSUMPTION	-40°C ~ 50°C, 10% ~ 90% HUMIDITY	
DIMENSIONS	ø150mm × 114mm (ø5.9 in x 4.5 in)	