

Infrared Illuminator Enclosure

EN-2070



EN-2070

EN-2070 Series Infrared Illuminator Enclosure


SUBJECT: TECHNICAL DATA CONTAINS:

GENERAL:

Entirely made of die-cast aluminum alloy Light ivory powder coating finished Supplied with Fully-cable-managed bracket And accessories for camera/lens installation

MECHANICAL:

a. Fully-cable-managed bracket: Entirely made of die-cast aluminum alloy Light ivory powder coating finished

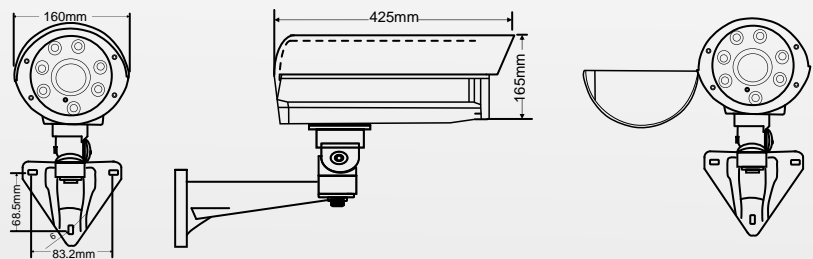

Inner space for camera: W110 x H115 x L200mm

ELECTRIC:

Infrared LED: 7PCS (850nm, bean angle 25°, 4 PCS and bean angle 45°, 3 PCS)

IR Light Distance: 50M-70M

Window Heater: Turn on at 18°C+/-3°C; Turn off at 18°C+/-3°C

12 Vdc Blower: Turn on at 35°C+/-3°C ;Turn off at 25°C+/-3°C

POWER SUPPLY:

Input Voltage: 90-240Vac (+/-10%)

Input Current: 2.0A/110V 1.0A/220V (+/-10%)

Output Voltage: 12A

Output Current: 5A

Ripple below 200mV ,Conform with safety standard

NR-2070 Series Infrared Illuminator Enclosure

ACCESSORIES:

a Fully cable managed bracket :

Entirely made of die cast aluminum alloy Light ivory powder coating finished



b Kit Pack

Anchor	3 pcs
Hexagonal Stainless Steel Screw	3 pcs
Stainless Steel Washers	4 pcs
Nylon Washers	4 pcs
L Type Hexagonal Wrench	1 pcs
For camera	
Plastic Pad	1 pcs
Plastic Washer	2 pcs
Hexagonal Stainless Steel Screw	1 pcs
Hexagonal Stainless Steel Screw	1 pcs

STANDRD SPECIFICATIONS:

CE in compliance with EN 55022: 1988 EN 50130-4:1995

FCC in compliance with ANSI C 63.4

IP66 in compliance with IEC 60529

RoHS & SVCH compliance

LED in compliance with IEC 60825-1: 1993+A1: 1997+A2: 2001

/ EN 60825-1: 1994+A1: 2002 + A2: 2001