

EX46LED Vandal-resistant Dome Illuminators

www.boschsecurity.com



BOSCH
Invented for life



- ▶ High-impact, vandal-resistant dome for short-range IR illumination
- ▶ 42 high-performance IR LEDs at 840 nm or 940 nm
- ▶ Fully rotational pan-tilt-twist gimbals for ease of installation
- ▶ Weather-sealed for performance in -50°C to +60°C (-58°F to +140°F)
- ▶ Conduit compatible for easy installation

These vandal-resistant domes are designed to provide award-winning infrared illumination from a housing resistant to even the most brutal attacks. Delivering up to 12 meters (40 feet) of illumination, each dome installs quickly and easily onto ceilings and walls with conduit compatibility.

Each dome contains high-performance LEDs mounted to a heat-sinking double-gimbal that can be easily adjusted to point in the desired direction. An adjustable photocell ensures accurate on/off switching. The infrared is also intensity-adjustable so that the optimal level of illumination can be selected. The IR domes are ideal for infrared enhancement of dark areas in restaurants, nightclubs, warehouses and wherever video surveillance requires night-time performance under covert or semi-covert conditions. The domes base is constructed of CNC-milled anodized aluminum, an incredibly durable material with high corrosion resistance and heat-resistant to over 1,200 °F. Anodized aluminum has excellent chemical stability and resists changes to color or appearance, even under heavy exposure to ultraviolet rays. The one-piece CNC fabrication process ensures

the highest degree of precision and high mechanical strength. Every enclosure is hammer-tough and weather-tight. All EX46LED domes are specified for performance in temperatures ranging from -50 °C to +60 °C (-58 °F to +140 °F).

Functions

Applications

- Night-time surveillance
- Commercial sites
- Hotels and casinos
- Transportation hubs
- Restaurants / bars
- Industrial parks
- Banks
- Prisons and correctional facilities
- Schools, colleges and universities
- Vandal-prone locations

Certifications and Approvals

CSA Type 4X

Outdoor Weather Rating


CSA C22.2 No 0-M1991

General Elec. Rqmts., Part II

CSA C22.2 No 1-M94	Audio, Video, and Similar Equip.
CSA C22.2 No 94-M91	Special Purpose Enclosures
UL Std No 50	Enclosures for Elec Equip.
UL Std No 2044	Commercial CCTV Equip.

Installation/Configuration Notes

Dimensions

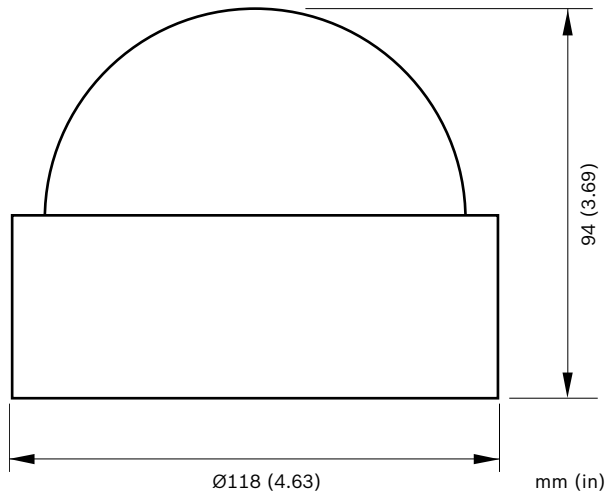

Technical Specifications

LED Type	850 nm or 940 nm
LED Beam Angles	30° medium or 60° wide
IR Control	Adjustable IR intensity
Photocell	Adjustable On/Off triggering

Electrical

Power Supply	12 - 24 VAC (50/60 Hz) 12 - 24 VDC
Power Draw	6 W max.
Power Protection	VRB included

Mechanical

Gimbal	Pan-Tilt-Twist for easy installation
Dome Construction	Polycarbonate dome, 3 mm (1/8 in) thick
Base Construction	CNC Anodized Aluminum
Weight	610 g (1.3 lbs)
Overall Dimension	118 mm (4.6 in) Diameter / 93 mm (3.7 in) H

Environmental

Operation Range	-50 °C to +60 °C (-58 °F to +140 °F)
-----------------	--------------------------------------

Ordering Information

EX46LED8MBC Vandel-resistant Dome IR Illuminator

LED IR illuminator, 850 nm, 30° medium beam, anodized black, clear dome
Order number **EX46LED8MBC**

EX46LED8WBC Vandel-resistant Dome IR Illuminator

LED IR illuminator, 850 nm, 60° wide beam, anodized black, clear dome
Order number **EX46LED8WBC**

EX46LED9MBC Vandel-resistant Dome IR Illuminator

LED IR illuminator, 940 nm, 30° medium beam, anodized black, clear dome
Order number **EX46LED9MBC**

EX46LED9WBC Vandel-resistant Dome IR Illuminator

LED IR illuminator, 940 nm, 60° wide beam, anodized black, clear dome
Order number **EX46LED9WBC**

EX46LED8MAC Vandel-resistant Dome IR Illuminator

LED IR illuminator, 850 nm, 30° medium beam, brushed aluminum, clear dome
Order number **EX46LED8MAC**

EX46LED8WAC Vandel-resistant Dome IR Illuminator

LED IR illuminator, 850 nm, 60° wide beam, brushed aluminum, clear dome
Order number **EX46LED8WAC**

EX46LED9MAC Vandel-resistant Dome IR Illuminator

LED IR illuminator, 940 nm, 30° medium beam, brushed aluminum, clear dome
Order number **EX46LED9MAC**

EX46LED9WAC Vandel-resistant Dome IR Illuminator

LED IR illuminator, 940 nm, 60° wide beam, brushed aluminum, clear dome
Order number **EX46LED9WAC**

Accessories

EXMB.045B Dome Pendant Bracket

Dome Pendant Bracket for EX40(N) and EX46LED, black
Order number **EXMB.045B**

EXMB.045S Dome Pendant Bracket

Dome Pendant Bracket for EX40(N) and EX46LED, clear aluminum
Order number **EXMB.045S**

UPA-2430-60 Power Supply

120 VAC, 60 Hz, 24 VAC, 30 VA Out
Order number **UPA-2430-60**

UPA-2420-50 Power Supply

220 VAC, 50 Hz, 24 VAC, 20 VA Out
Order number **UPA-2420-50**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
al.securitysystems@bosch.com
www.boschsecurity.com