

2 Megapixel Day & Night Fixed Dome Network Camera

FD-200A Series

HDTV 1080p/720p • 2M/1.3M Resolution Supported



- 2 Megapixel High Resolution Indoor Fixed Dome Camera
- **SmartFocus®** to Ease the Zoom and Focus Adjustment Remotely (*)
The feature is for FD-200Ap/FD-200ApV5
- **FocusEasy™** to Ease the Focus Adjustment via the Buzzer for notification (*)
*The feature is for FD-202ApV5 *
- HDTV Quality (Full HD 1080p @ 25fps Streaming)
- Motorized Lens /Vari-Focal Lens for Variable Needs
- MPEG-4, MJPEG and H.264 Triple Codec Compression
- **Intelligent Multi-Profile Sensor Management®** for Different Environments
- Removable IR-cut Filter /Auto Light Sensor for Day and Night
- 1 DI/DO for External Alarm and Sensor Device
- 3 Axis design
- Two-way Audio/Built-in SD/SDHC/SDXC Memory Card Slot for Local Storage
- Power over Ethernet/DC 12V/AC 24V Support




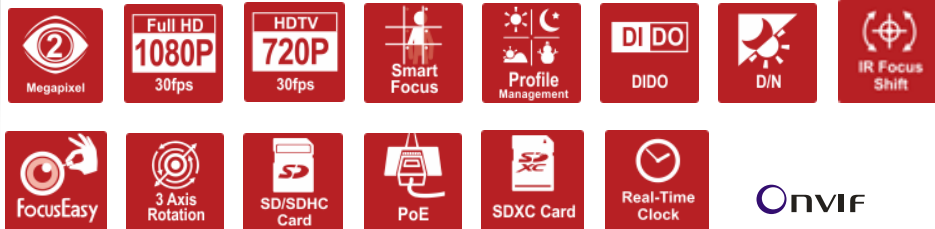


Photo Indication & Dimension Diagram

FD-200Ap/FD-202Ap

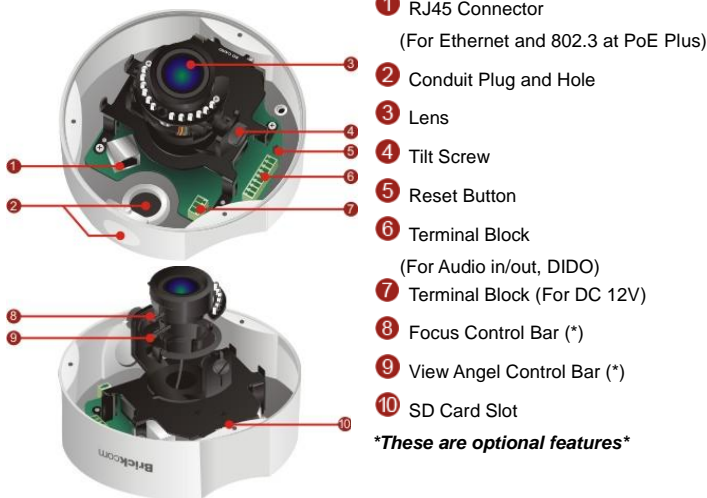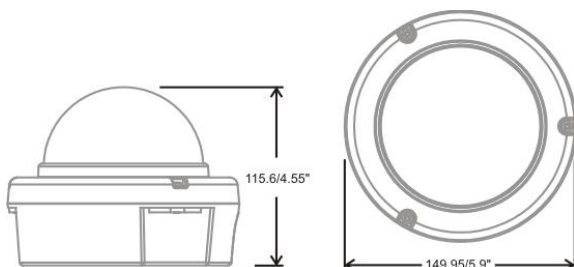

FD-200Ap V5/FD-202Ap V5

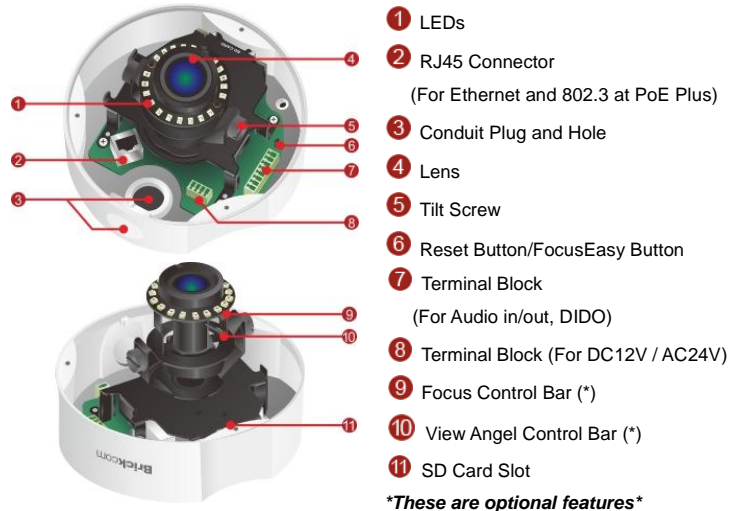

Camera		Events and Alarm Management	
Models	FD-200Ap/FD-200Ap V5 2M, Motorized Lens, Smart Focus FD-202Ap 2M, Vari-Focal Lens FD-202Ap V5 2M, Vari-Focal Lens, FocusEasy	Events	Motion Detection/ Schedule/ Audio Detection/ Digital Input/ Temperature Alarm(*)/ Auto Focus Shift for Day & Night(**) *FD-200Ap V5/FD-202Ap V5 Only **FD-200Ap V5 Only
Hardware System	CPU: 533 MHz Flash: 32M RAM: 256M DDR	Alarm	Stream/Snapshot to FTP/Email/Samba/SD-Card HTTP/Email Notification/ Digital Output
Image Sensor	Sensor Type : 1/2.5" CMOS Sensor Sensor Resolution :1920x1080 pixel	Audio	
Minimum Illumination	FD-200Ap 0 lux (IR ON, B/W) 0.008 lux (IR OFF, B/W) 0.01 lux (F1.4, Color) FD-202Ap/FD-200Ap V5/FD-202Ap V5 0 lux (IR ON, B/W) 0.01 lux (IR OFF, B/W) 0.02 lux (F1.4, Color)	Audio Streaming	2-way Audio Support
IR Illuminators	FD-200Ap/ FD-202Ap Built -in IR Illuminators, effective up to 10 meters IR LED: 12pcs IR wavelength: 850nm FD-200Ap V5/ FD-202Ap V5 Built -in IR Illuminators, effective up to 25 meters IR LED: 20pcs IR wavelength: 850nm	Audio Compression	G.711, AMR (8 kHz, Mono, PCM)
Lens	Lens Type: Board Lens F No.: 1.4 FD-200Ap Focal Length: f= 3mm(W)~10.5mm(T) View Angle(Normal Mode): (H): 69°~24°/ (V): 41°~14°/ (D):79°~28° View Angle(Ultra Wide Mode): (H): 108°~35°/ (V): 55°~19°/ (D):119°~40° FD-202Ap/FD-200Ap V5/FD-202Ap V5 Focal Length: f= 3.3mm(W)~10.5mm(T) View Angle(Normal Mode): (H): 64°~24°/ (V): 36°~14°/ (D):74°~28° View Angle(Ultra Wide Mode): (H): 106°~33°/ (V): 77°~22°/ (D):114°~41°	Audio Input/ Output	Line In/ Out
Day & Night ICR	Triggered by Light sensor, Scheduling, Digital Input	General	
Local Storage	Built-in SD/SDHC/SDXC Max.64G Memory Card Slot	Communication	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, IPv6
Video		Power Input/ Operating Temperature	0°C ~ 50°C (32°F ~122°F) FD-200Ap/FD-202Ap PoE 802.3 af/ DC12V 1A FD-200Ap V5 PoE 802.3 af/ DC12V 1.5A/AC 24V FD-202Ap V5 PoE 802.3 af/ DC12V 1A/AC 24V
Compression Streaming	H.264 / MPEG4 / MJPEG Simultaneous multiple streams	Max. Power Consumption	DC12V 1A FD-200Ap: 10 Watts / FD-202Ap: 8 Watts DC12V 1.5A/AC 24V FD-200Ap V5: 12.5 Watts DC12V 1A/AC 24V FD-202Ap V5: 10.5 Watts 802.3 af POE FD-200Ap: 12.5 Watts / FD-202Ap: 10 Watts FD-200Ap V5: 15 Watts / FD-202Ap V5: 12.5 Watts
Video Setting	Multi-Profile Image Management: Day/ Night/ Sunset/ User 1/ User 2 Auto Exposure Control Manual Exposure Control: 1/20000~1/5s Manual Gain Control: 1X ~ 32X Manual White Balance Control: 2000K~7000K	Environment	Operating Humidity : 10% ~ 80%
S/N Ratio	38.1 dB	Dimension	115.6(D) X 149.95 (H) mm
Image Resolution	2M (Full HD): 1920x1080 @ 25fps 1M : 1280x720 @ 25fps	Weight	509g/1.13lb
		Certification	FCC, CE
		Viewing System Requirements	OS: Microsoft Windows 8/7/Vista/XP/2000 Browser: Mozilla Firebox, Internet Explorer 7/8 or above, Safari, Google Chrome Cell Phone: 3GPP player Real Player: 10.5 or above Quick Time: 6.6 or above VLC
		Warranty	Limited 2-year warranty

Work Best With

Camera Accessories Options



L-WM-01
Camera Bracket



POE16U *
PoE Injector

Network Equipment Options



PS-588I
8-port 10/100M PoE Fast Ethernet Switch



PS-7242IL-AF
24-port 10/100M PoE Web Smart Ethernet Switch