


# PD16W

## UL Listed Power Distribution Module

### Description

Altronix PD16W UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into sixteen (16) individually fuse protected outputs.

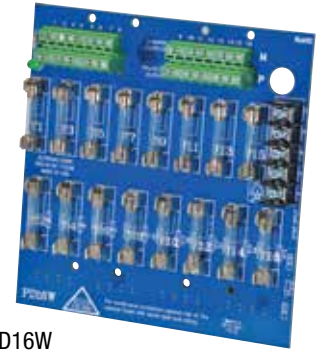

PD16W

### Specifications

#### Input

**Voltage Range** 12VDC or 24VDC, up to 10A or  
24VAC or 28VAC, up to 12A.

#### Outputs

Sixteen (16) fuse protected outputs.  
2.5A per output max.  
Total output current should not exceed max current rating of power supply employed.  
Fuses are rated @ 3.5A/250V.

#### Indicators (LED)

**DC Output** Power LED.

#### Agency Listings

**UL:**  
**Access Control** UL294  
**Burglar Alarm** UL603  
**Fire Alarm** UL1481

**cUL:**  
 General Signaling Equipment Evaluated to  
 CSA Standard C22.2 No.205-M1983.  
 Power Supplies for Burglar Alarm Systems  
 ULC-5318-96.

#### Physical and Environmental

**Dimensions (W x L x H)**  
 6" x 5.875" x 0.95" (152.4mm x 149.225mm x 24.13mm).  
**Product Weight** 0.4 lbs. (0.18 kg).  
**Shipping Weight** 0.5 lbs. (0.23 kg).  
**Temperature**  
**Operating** 0 to 49° C (32 to 120° F).  
**Storage** -20 to 70° C (-4 to 158° F).  
**Relative Humidity** 85% +/-5%.