



ULT-ALLMIFP43



ULT-ALLMIP43



ULT-ALLMIB36

## ULT-ALLMI Series

All-In-One 2 Megapixel/1080p TVI/CVI/AHD or Analog Miniature Square Camera

### Features

- 1/3" Panasonic 2.2 Megapixel Progressive Scan CMOS
- 1080p Hybrid HD (TVI/CVI/AHD)
- CVBS (960H) Option
- 3D-DNR (Digital Noise Reduction)
- Sens-up
- D-WDR
- OSD Remote (Attached to cable)
- 25 x 25mm Mini Square
- 12VDC Operation




### Video Output Signal:

- Press LEFT key and hold for 5 seconds: 960H CVBS
- Press RIGHT key and hold for 5 seconds: TVI
- Press UP key and hold for 5 seconds: AHD
- Press DOWN key and hold for 5 seconds: CVI

Cables available without OSD Controller. Factory can preset and change cable to standard type (OSD not available with standard cable).

Camera	
Image Device	1/3" type Panasonic MOS
Scanning System	Progressive Scan
Total Pixels	1956(H) x 1266(V) : 2.48Mega pixel
Effective Pixels	1944(H) x 1092(V) :2.12Mega pixel
Lens fitted	3.6mm board, 4.3mm pinhole
Min. Illumination	0.1Lux@F2.5 , 30IRE
Sync System	Internal
Electronic Shutter	60Hz : 1/30~1/30,000sec, 50Hz : 1/25~1/30,000sec
Angle of View	ULT-ALLMIFP43: 4.3mm (90(H)/57.80(V)/48.60(D)) ULT-ALLMIP28: 2.8mm (125(H)/82(V)/56(D)) ULT-ALLMIP43: 4.3mm (78.20(H)/60.50(V)/44.50(D)) ULT-ALLMIB36: 3.6mm (96(H)/72(V)/120(D))
Video	
Output	TVI/CVI/AHD/CVBS(960H)
Resolution & Frame rate	1080@30p/25p, 720@30p/25p
Other	
Operating Temperature	14°~122° (-10°C~+50°C)
Storage Temperature	-4°~140° (-20°C~+60°C)
Humidity	Less than 80%
Power Consumption	DC12V(±10%), Max.130mA
Weight(g)	Approx. 220

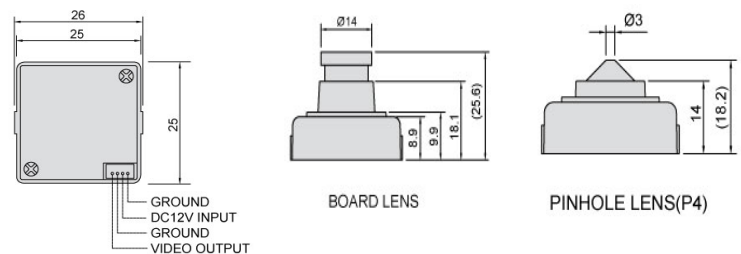

### Ordering Information

- ULT-ALLMIFP43: 2 Megapixel Miniature 4.3 Flat Pinhole
- ULT-ALLMIP28: 2 Megapixel Miniature 2.8mm Conical Pinhole
- ULT-ALLMIP43: 2 Megapixel Miniature 4.3mm Conical Pinhole
- ULT-ALLMIB36: 2 Megapixel Miniature 3.6mm

2 MEGAPIXEL | 1080p