

5 Megapixel Day & Night Vandal Dome Network Camera

VD-500Ap V5


HDTV 1080p/720p • 5M/4M/3M/2M/1.3M Resolution Supported





- 5 Megapixel High Resolution Outdoor Vandal Dome Camera
- **SmartFocus**® to Ease the Zoom and Focus Adjustment Remotely
- HDTV Quality (Full HD 1080p @ 30fps Streaming)
- MPEG-4, MJPEG and H.264 Triple Codec Compression
- **Intelligent Multi-Profile Sensor Management**® for Different Environments
- Removable IR-cut Filter /Auto Light Sensor for Day and Night
- 1 DI/DO for External Alarm and Sensor Device
- 3 Axis design
- Two-way Audio/Built-in SD/SDHC/SDXC Memory Card Slot for Local Storage
- IK10 Vandal Proof and IP67 Weather Proof Outdoor Enclosure
- Power over Ethernet/DC 12V/AC 24V support
- Smart IR to adjust the IR LED light across the entire area to get a well illuminated image



Photo Indication & Dimension Diagram

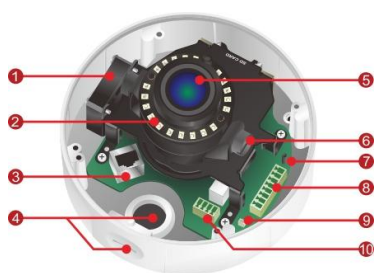

- | | |
|--|--|
| 1 Fan | 8 Terminal Block
(For Audio in/out, DIDO) |
| 2 LEDs | 9 TV Out Connector |
| 3 RJ45 Connector
(For Ethernet and 802.3 at PoE Plus) | 10 Terminal Block (For
DC12V/AC24V) |
| 4 Conduit Plug and Hole | 11 SD Card Slot |
| 5 LENS | |
| 6 Tilt Screw | |
| 7 Reset Button | |

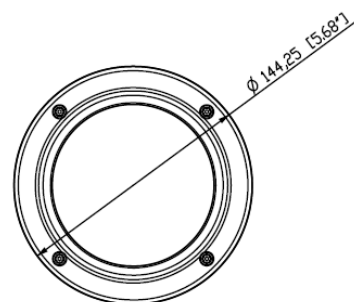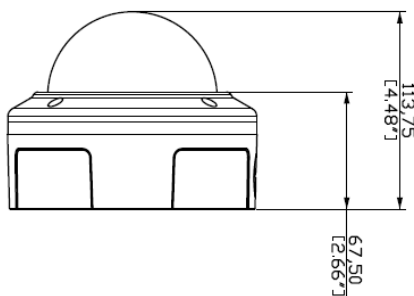

Camera

Models	5M, Motorized Lens, SmartFocus®
Hardware System	CPU: 533 MHz Flash: 32M RAM: 256M DDR
Image Sensor	Sensor Type : 1/2.5" CMOS Sensor Sensor Resolution : 2592 x 1944 pixel
Minimum Illumination	0 lux (IR ON, B/W) 0.008 lux (IR OFF, B/W) 0.01 lux (F1.4, Color)
IR Illuminators	Built -in IR Illuminators, effective up to 25 meters IR LED: 20pcs IR wavelength: 850nm
Lens	Lens Type: Board Lens F No.: 1.4 Focal Length: f= 3.3mm(W)~10.5mm(T) View Angle(H/V/D): Normal Mode:90°~33°/65°~25°/115°~41°
Day & Night ICR	Triggered by Light sensor, Scheduling, Digital Input
Local Storage	Built-in SD/SDHC/SDXC Max.64G Memory Card Slot

Video

Compression Streaming	H.264 / MPEG4 / MJPEG Simultaneous multiple streams
Video Setting	Multi-Profile Image Management: Day/ Night/ Sunset/ User 1/ User 2 Auto Exposure Control Manual Exposure Control: 1/20000~1/5s Manual Gain Control: 1X ~ 32X Manual White Balance Control: 2000K~7000K
S/N Ratio	38.1 dB
Image Resolution	5M : 2592x1944 @ 10fps (5M supports MJPEG only) 4M : 2304x1728 @ 15fps 3M : 2048x1536 @ 18fps 2M (Full HD) : 1920x1080 @30fps 1M : 1280x720 @ 30fps

Events and Alarm Management

Events	Motion Detection/ Schedule/ Audio Detection/ Digital Input/ Temperature Alarm/ Auto Focus Shift for Day & Night
Alarm	Stream/Snapshot to FTP/Email/Samba/SD-Card HTTP/Email Notification/ Digital Output

Audio




Audio Streaming	2-way Audio Support
Audio Compression	G.711, AMR (8 kHz, Mono, PCM)
Audio Input/ Output	Line In/ Out

General



Communication	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, IPv6
Power Input/ Operating Temperature	802.3 af POE/ DC12V 1A /AC 24V: -20°C ~ 60°C (-4°F ~140°F) 802.3at PoE Plus(build in fan and heater): -40°C ~ 60°C (-40°F ~140°F)
Max. Power Consumption	DC12V 1.5A/AC 24V:12.5 Watts 802.3 af POE:15 Watts 802.3 at POE Plus:27.5 Watts
Environment	Water Proof: IP67 Operating Humidity : 10% ~ 80%
Dimension	113.75 (D) mm X 144.25(H) mm
Weight	860g/1.90lb
Housing	Weather-proof (IP67) Vandal-proof (IK10)
Certification	FCC, CE, IK10
Viewing System Requirements	OS: Microsoft Windows 8/7/Vista/XP/2000 Browser: Mozilla Firefox, Internet Explorer 7/8 or above, Safari, Google Chrome Cell Phone: 3GPP player Real Player: 10.5 or above Quick Time: 6.6 or above VLC
Warranty	Limited 2-year warranty

Work Best With

Camera Accessories Options

	L-WM-01 Camera Bracket
	POE30U * High Power PoE Injector
	WPC * Waterproof Connector

Network Equipment Options

	PS-588I-v2 8-port 10/100M PoE Fast Ethernet Switch
	PS-7242IL-AT 24-port 10/ 100M High Power PoE+ Web Smart Ethernet Switch