

VTD-MV8NZ311P

Virtuoso Series 8 MegaPixel [4K] IP-68 WDR IP Vandal Proof Dome Camera [preliminary specs]



VITEKCCTV.COM
(888) VITEK-70


Virtuoso



KEY FEATURES

- 1/2.5" 8.29 MegaPixel RGB Bayer Array Sony CMOS STARVIS® Sensor
- 8 MegaPixel [4K] Network Camera (3840x2160px @ 30/25fps)
- ONVIF Compliant with Zero Configuration, ONVIF Event Mapping
- Cross web browsing (IE, Edge, Safari, Firefox, Chrome)
- 2 SMD Hi Power IR LEDs with a 100' IR Range
- Adaptive Web-Based Resizing (Layout/Display Device Resolution Dependent)
- Quad Streaming: H.265+; Main, H.264+; High, Main, Base, & MJPEG
- MicroSD Memory Card Slot (Supporting Local Recording up to 128GB)
- 2-way Audio, Alarm Input/Output
- ICR Dual Filter Switch
- F=3.6~11mm Motorized Zoom Lens with Auto Focus
- 120dB Dynamic Range with DOL (Digital Overlap) WDR @30/25fps
- Improved Noise Reduction with XD-DNR
- LDC (Lens Distortion Compensation), VCA (Video Contents Analysis) Function
 - Line Crossing, Field intrusion, Appear/Disappear
- Smart Stream, Rol (Region of Interest)
 - Enables Smart Processing of Video Data According to User's Needs
 - Enables High Quality Video on Rol and Lower Quality Video on non-Rol
 - Lowers Overall Bandwidth and Reduces Storage Burden
- Motion Detection, Privacy Masking, Defog, D-Zoom(~10x), Mirror/Flip, Sens-up (Slow shutter), Hue, Control, Brightness / Saturation, Sharpness
- Circuit Protection Against Faulty Connection in Power Polarity
- Isolated Power Supply Protects Against Ground Loop Issues
- Built-in Fan and Optimized Cooling System
- Flush and Surface mount (Optional: Various Adaptors, See Below)
- IP68/IK10, Aluminum Cast, Flush and Surface Mount, 3-Axis Gimbal, Double Sided Anti-scratch Hard Coated Clear Bubble
- 12VDC, 24VAC and PoE Operation (Power over Ethernet, IEEE Std. 802.3af)

DIMENSIONS

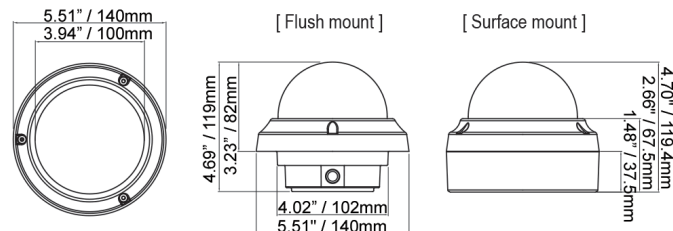

VT-MV/PLMT Pole mount adaptor
VT-MV/WMT Wall mount bracket
VT-MV/TB Tilted dome adaptor
VT-MV/JMT Tilted Junction mount adaptor

SPECIFICATIONS

| | |
|-------------------------------------|--|
| Imaging Sensor | 1/2.5" 8.29 MP RGB Bayer Array CMOS Sony STARVIS® Sensor |
| Effective Pixels | 3840(H) x 2160(V) |
| Sensitivity | Color : 0.2 Lux, B/W : 0.02 Lux (Sens-up OFF) |
| Scanning Mode | Progressive Scan |
| S/N Ratio | 51dB |
| IR LEDs / Range | 2 Hi Pwr 850nm IR LEDs / 100' |
| Lens | F=3.6~11mm F1.5, 3x Motorized Zoom Lens |
| Day/Night | ICR by Auto, Day, Night, External, Color D/N |
| Auto Exposure | Automatic (Priority: Frame rate/Low noise), Manual |
| Shutter Speed Control | Automatic: Min. 1/10,000 sec ~ Max.1/30 sec Manual: Min. 1/10,000 sec ~ Max.1/30 sec |
| Gain Control | Automatic: ~ Max. 39dB / Manual: ~ Max. 39dB |
| Auto White Balance Mode | ATW-Indoor/Outdoor, Shade, Clear sky, Fluorescent light, Light bulb, Flame, Manual |
| Digi Overlap (DOL) WDR | 120dB Dynamic Range w/ DOL: 3x Scan Images @ 30/25fps |
| DNR | XD-DNR (2D-NR, 3D-NR) |
| Functions | Motion Detection, Privacy Mask, Defog, D-Zoom(~10x), Mirror/Flip, Sens-up(Slow shutter), Brightness, Contrast, Saturation, Sharpness, Hue, LDC, Vertical View (90°/270°) |
| Installation Temp. | -4°F ~ 122°F (-20°C ~ +50°C) / Humidity : 20%RH ~ 80%RH |
| Operating Temp. | -40°F ~ 122°F (-40°C ~ +50°C) / Humidity : 20%RH ~ 80%RH |
| Dimensions | 5.51" W x 4.69" H x 3.94" Diameter (140 x 119 x 100mm) |
| Weight | 2.2lbs w/out Surface Mount (1kg) |
| Ingress Protection / Impact Housing | IP68 / IK10 Aluminum Cast, Flush and Surface Mount, 3-Axis Gimbal, Double Sided Anti-Scratch Hard Coated Clear Bubble |
| Power Input | PoE(IEEE Std. 802.3af), DC12V/AC24V |
| Pwr Consump. DC12V, 24VAC | 570mA (IR Off) / 1080mA (IR On), 285mA (IR Off) / 540 (IR On) |
| Power Consumption (PoE) | 8.5 Watts |
| Video Compression | H.265+; Main, H.264+; High, Main, Base, & MJPEG |
| Video Resolution | 3840x2160(4K), 2592x1520, 1920x1080, 1600x900, 1280x720, 960x540, 640x360, 320x180 |
| Video Frame Rate | Up to 30/25fps@3840x2160p |
| Video Streaming | Simultaneous H.265 and MJPEG (Quad Streaming) or Simultaneous H.264 and MJPEG (Quad Streaming) Independent Frame Rate and Bandwidth Control, VBR/CBR Mode |
| FTP Uploading | MJPEG Still Image |
| Login Authority | Administrator, Operator, Guest |
| Security | Multi User Authority, IP Filter, HTTPS Video Stream, Import/Export |
| Network Time Sync. | Synchronize Computer/NTP Server, Manual |
| Software Reset | Restart, Reset, Factory Default |
| Auto Recovery | Backup, Restore |
| Remote Upgrade | Using Web Browser |
| Protocol | TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf, Bonjour |
| Client Software | Built-In Web, ONVIF Compatible 3rd Party VMS |
| SD Memory Card | Slot for 128GB Micro SD Memory Card (H.264 recording) |
| Audio & Alarm | 2-way Audio & Alarm Input / Output |
| SDK Support | API, ONVIF Profile S Compliant |

*Sony STARVIS® is a registered trademark of Sony, an independently owned and operated company. This product has not been licensed or endorsed by Sony®.

