

5" Touch Screen LCD Monitor with Integrated Audio



WDL-5002TCM


MAIN FEATURES

- Touch Screen Digital Panel
- Weatherproof High Resolution TFT LCD Monitor
(With Remote Control, Mounting Bracket and Accessories)
- Composite, VGA Video Inputs
- Selectable Mirror-Image Mode
- Active Matrix for Absolute Picture Clarity
- OSD for AV Source (Color, Brightness, Contrast, Tint & Volume Control)
- NTSC and PAL
- Integrated Audio Speaker
- Wide Range Input Voltage (DC 12V~32V)

WELDEX CAN CUSTOMIZE LCDS FOR YOUR SPECIFIC NEED!!

WDL-5002TCM (5" Touch Screen LCD Monitor with Integrated Audio)

DIMENSIONS

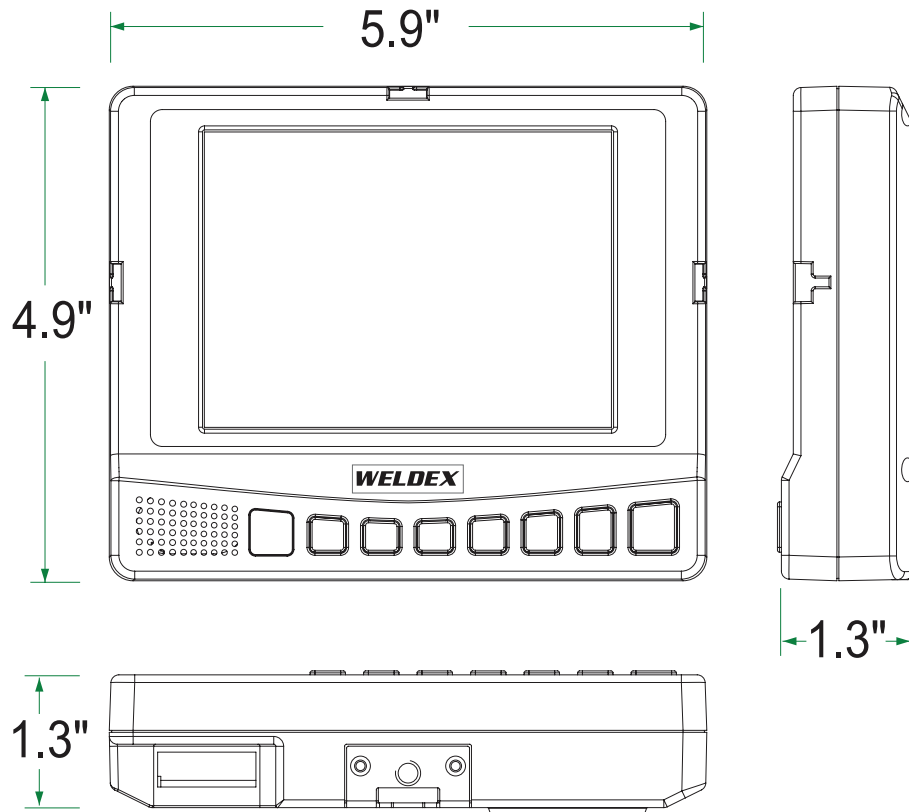

SPECIFICATIONS

Touch Screen	Resistive 4Wire Controller USB or Serial Interface RS-232
Screen Size	5.0"(Diagonal)
Resolution	960 (W) x 234 (H)
Contrast Ratio	150:1
Brightness	Max 400cd/m2
Dot Pitch(mm)	0.107(H) X 0.31(V) mm
Active Area(mm)	102.72(H) X 74.53(V) mm
Viewing Angle	Left 55° / Right 55° / Up 15° / Down 35°
Dimensions	5.9" (W) x 4.9" (H) x 1.3" (D)
Color System	NTSC / PAL
Video Input	1x Composite (RCA); 1x VGA
Audio Input	1x Mono Audio (RCA)
Power Supply	DC 12~32 Volt
Operating Temperature	-20°C ~ +80°C