

Construction

Dimensions	Mini 1U, 325.0 mm × 256.6 mm × 55.0 mm (12.80" × 10.10" × 2.17")
Net Weight (without HDD)	1.19 kg (2.62 lb)
Gross Weight	1.64 kg (3.61 lb)
Installation	Desktop installation

Environmental

Operating Conditions	-10°C to +55°C (+14°F to +131°F), 0%–90% (RH)
Storage Conditions	-20°C to +70°C (-4°F to +158°F), 0%–90% (RH)

Third-party Support

Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
---------------------	---


Certifications

Certifications	FCC: Part 15 Subpart B
	CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2; EN 61000-3-3; EN 55032; EN 50130; EN 55024

Ordering Information

Type	Model	Description
8 Channel WizSense XVR	DH-XVR5108H-I3	Mini 1U WizSense Digital Video Recorder

Panels

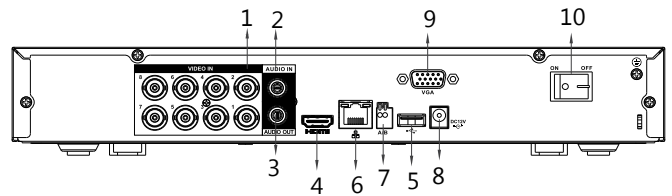

- | | | | |
|---|--------------------------|----|--------------------|
| 1 | VIDEO IN | 6 | Network Interface |
| 2 | AUDIO IN, RCA Connector | 7 | RS485 Interface |
| 3 | AUDIO OUT, RCA Connector | 8 | DC 12V Power Input |
| 4 | HDMI Interface | 9 | VGA Interface |
| 5 | USB Interface | 10 | Power Switch |

Dimensions (mm[inch])

