

## 2 Specifications

Dimensions	37 cm x 32 cm x 8.9 cm (14.5 in x 12.5 in x 3.5 in)
Color	White
Compatible Lockset (optional)	D101 Lock and Key Set
Compatible Tamper Switch (optional)	ICP-EZTS Tamper Switch D110 Tamper Switch
Material	1.0 mm (20 gauge) cold-rolled steel

## Medium Control Panel Enclosure B10



en Installation Guide



### Reading Bosch Security Systems, Inc. Product Date Codes

For Product Date Code information, refer to the Bosch Security Systems, Inc. Web site at: <http://www.boschsecurity.com/datecodes/>.



## 1 Overview

The B10 Medium Control Panel Enclosure houses select Bosch control panels and modules. The enclosures are compatible with an optional enclosure tamper switch, optional lock and key set, and can hold two batteries.

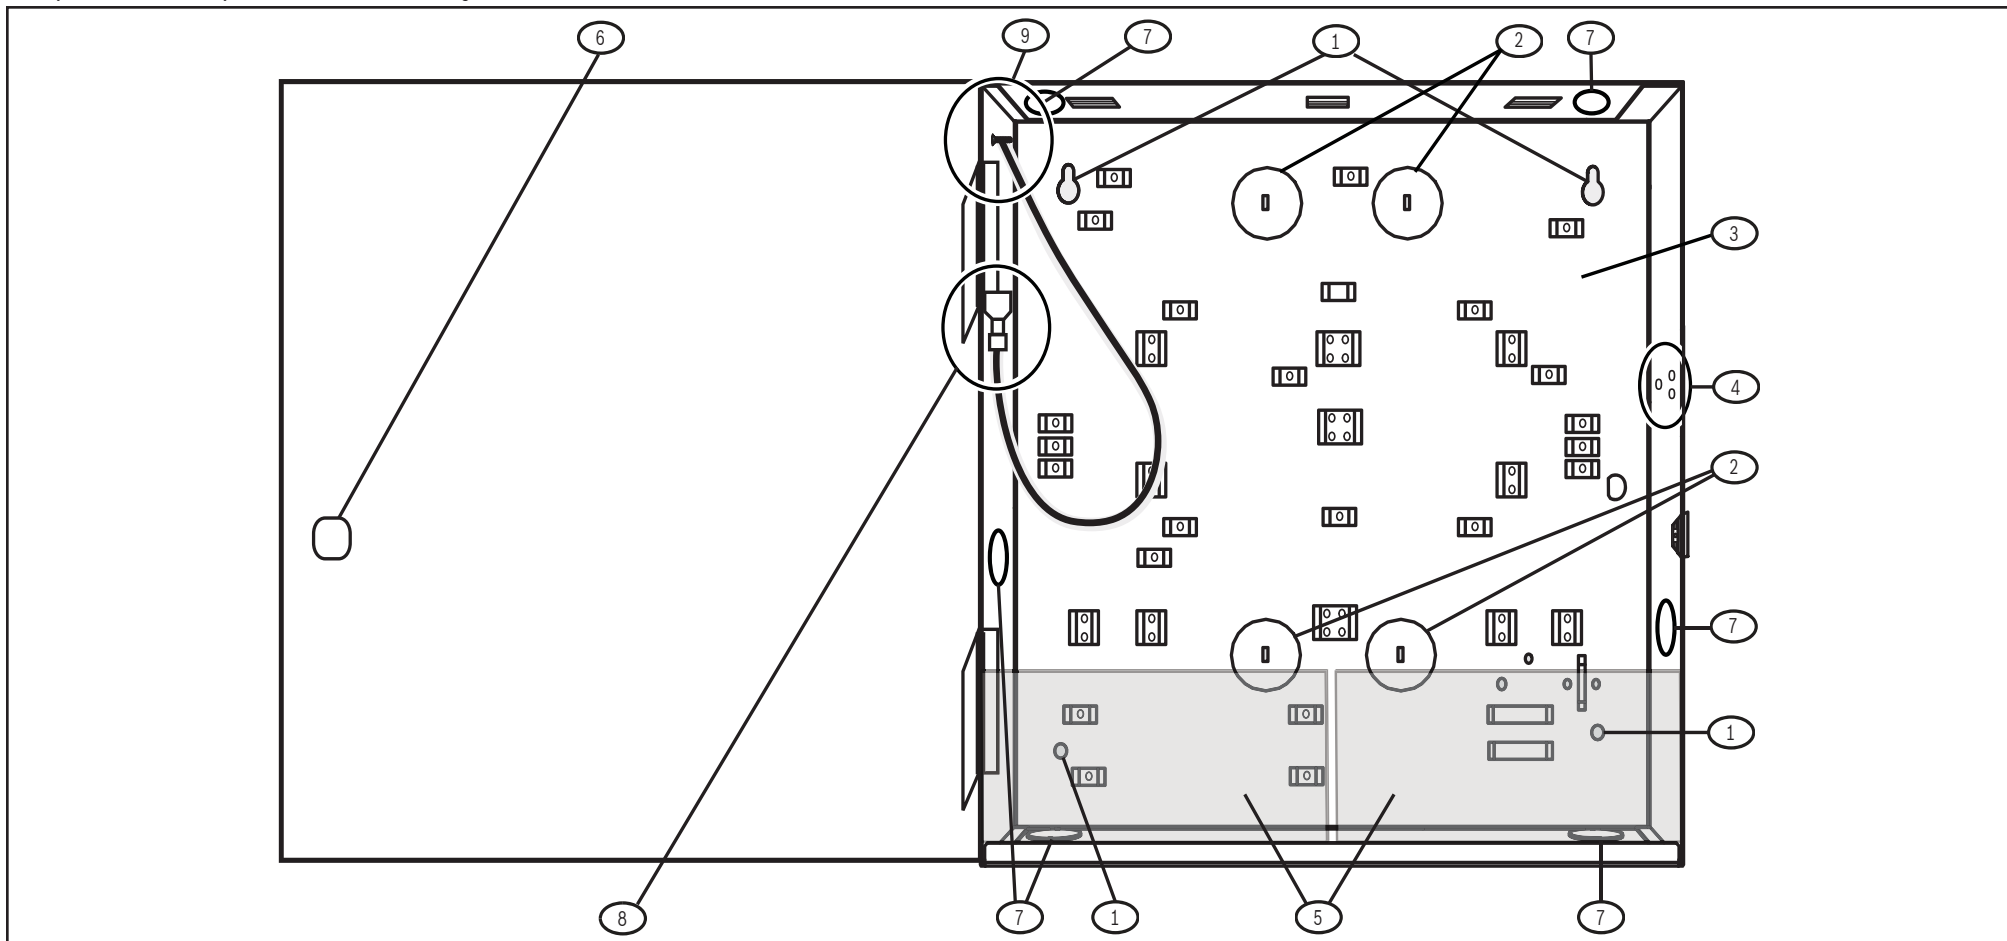


Figure 1.1: B10 Medium Control Panel Enclosure overview

Callout	Description
1	Enclosure mounting holes (4). Bosch recommends using #10 screws and appropriate wall anchors to secure the enclosure base to the wall.
2	Wire knockouts (4)
3	Control panel mounting location
4	Tamper switch mounting location
5	Battery mounting location (up to 2 - 7Ah batteries)
6	Lockset mounting location
7	Conduit knockouts (6) 4 - 12.7mm (1/2in), 2 - 19.05mm (3/4 in)
8	Grounding (bonding) connection to enclosure door
9	Do not connect any other wires to this lug. Grounding (bonding) connection for door only.