

# AV2105

## 2 Megapixel H.264 IP MegaVideo® camera

AV2105 (Color)

AV2105DN (Day/Night)

AV2105-AI (Color Auto-Iris)



### Arecont Vision Advantages:

#### World's First Full Line of H.264 Megapixel Cameras

- 1.3 to 5 megapixels with no frame rate reduction

#### H.264 (MPEG4 Part 10) Compression Standard

- Simultaneous support of both H.264 and MJPEG
- 10x average bandwidth and storage reduction over MJPEG

#### Multi-Streaming

- Up to 8 concurrent non-identical streams with different frame rates, bit rates, resolutions and picture quality

#### Bit Rate Control

- Maintain desired bandwidth and storage size

#### Real Time Streaming Protocol (RTSP)

- Allows for compatibility with media players such as Apple QuickTime, Windows Media Player, VLC Player, etc.

#### Superior Low Light Performance

- 1/2" CMOS Sensor

#### Unparalleled High Definition Resolution - 1600 x 1200

- Six times the resolution of IP VGA or analog cameras

#### Fastest MegaPixel Image Rates

- Up to 24fps in 2 megapixel mode

#### Forensic Zooming

- Zoom live or after-event while recording full field of view in HD ... replace PTZ devices

#### Reduced Overall System Cost

- Less cameras to install, less wiring, no external power (POE), less NVR licensing fees

#### Cost Efficiency

- Comparable cost to IP VGA & analog cameras

#### Full or 1/4 Resolution

- Can be selected for either live viewing or archiving purposes

#### Other key features:

- Simultaneous full field of view and Region-of-Interest (ROI)
- Image cropping allows streaming of full density partial images
- On-camera motion detection
- Mechanical IR Cut Filter (DN Version) and more

*The AV2105 series network camera is part of Arecont Vision's full line of H.264 megapixel cameras. This fully compliant implementation of H.264 (MPEG 4, Part 10) is capable of sustaining over 80 billion operations per second and maintaining full motion progressive scan 1600 x 1200 video at 24 fps. Part of the MegaVideo® line of cameras, it offers bandwidth and storage efficiency of 10X greater on average over traditional megapixel counterparts.*

H.264 camera series

Learn more about our products at [www.arecontvision.com](http://www.arecontvision.com)

## Model Numbers:

- AV2105 - Color
- AV2105-AI - Color Auto-Iris
- AV2105DN - Day/Night

## Imaging

- 2 megapixel CMOS image sensor
- 1600(H) x 1200(V) pixel array
- 1/2" optical format
- 4.2 µm pixel pitch
- Bayer mosaic RGB filter
- Minimum illumination of:
  - Color: 0.1 Lux @ F1.4
  - Day/Night: 0 Lux, IR sensitive
- Dynamic range 61 dB
- Maximum SNR 50 dB

## Full Field of View (FOV) Resolutions

- 1600(H)x1200(V)                      2 megapixel
- 800(H)x600(V)                          1/4 resolution

## Cropped Field of View Resolutions

- 1280x1024                      1.3 MP
- 1280x720                      HDTV-720p
- 1024x768                      XGA
- 800x600                      SVGA
- 704x570                      PAL
- 704x480                      NTSC
- 640x480                      VGA
- 352x288                      CIF
- 320x240                      SIF

## Data Transmission

- Video frame rate up to:
  - 24fps @ 1600x1200
  - 32fps @ 1280x1024
- Compression type
  - H.264 (MPEG4, Part 10)
  - Motion JPEG
  - 21 levels of quality
- TFTP, HTTP, RTSP, RTP/TCP, RTP/UDP image transmission protocols
- 100Base-T Ethernet Network Interface
- Data rate
  - bit rate control from 100Kbps to 10Mbps
  - bit rate control available for full view, multi view, and archive
  - unthrottled data rate up to 55Mbps
- Multi-streaming: 8 non-identical streams

## Programmability

- Auto Exposure (AE) and Gain Control (AGC) >120dB
- On-camera real-time motion detection with 64 detection zones
- Auto backlight compensation
- Auto multi-matrix white balance
- 50/60Hz selectable flicker control
- Electronic pan, tilt, zoom (PTZ)
- Electronic image flip - 180 degree rotation
- Resolution windowing down to 32x32 pixels window
- Programmable shutter speed to help control motion blur
- MoonLight™ mode - extended exposure and proprietary noise cancellation
- Programmable resolution, brightness, saturation, gamma, sharpness, tint
- Picture-in-Picture: simultaneous delivery of full field of view and zoomed images
- Bandwidth & storage savings by running at 1/4 resolution

## Electrical

- General purpose opto-coupled input and output
- Power over Ethernet (PoE): PoE 802.3af
- Auxiliary power: 12-48VDC and 24VAC
- Power consumption 4.5 Watts maximum
- Optional DC AI connection (AV2105 - AI)

## Regulatory Approvals


- FCC, CE and RoHS compliant

## Environmental

- Operating temperature 0°C (32 °F) to +50°C (122 °F)
- Storage temperature -20°C (-4 °F) to +60°C (140 °F)
- Humidity 0% to 90% (non-condensing)

## Mechanical

- 3"W (76 mm) x 2.5"H (63.5 mm) x 2.25"D (57mm) (w/o lens)
- 8.6 oz (243 grams) (w/o lens)
- C/CS lens mount

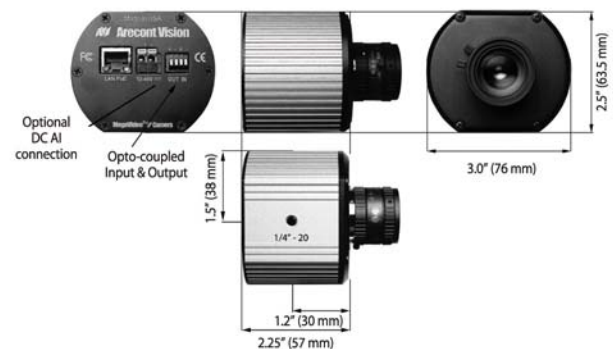

## Housing Accessories:

- Dome 4-I - Indoor 4" Vandal Dome
- Dome 4-O - Outdoor 4" Vandal Dome
- Dome 5-I - Indoor 5" Recessed Dome
- HSG1-O-W - Outdoor Environmental Housing w/Heater/Blower

## Lenses:

- MPL4-10
- MPL8-16
- MPL4.0
- MPL6.0
- MPL8.0
- LENS4-13
- LENS4-10AI

\* Other megapixel lenses are also available with Arecont Vision's housing options.



Made in USA

Revised on 12/10/09