




EK-B36-MINI


**4MP 3.6mm Fixed Lens
IR Mini Bullet Camera**

Can be set to 2MP

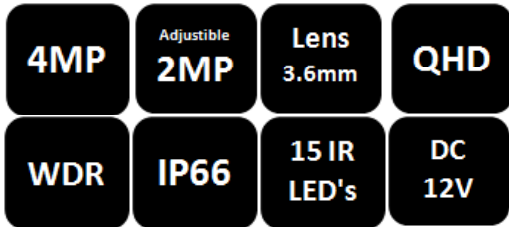


Features:

- 1/2.8" 5.14 Mega CMOS Sensor
- 3.6mm Fixed Lens
- QHD (2560x1440) , FHD (1920x1080)
- Smart IR & WDR
- Day & Night Function
- IP66
- 15IR LEDs, IR Distance 15m (50ft)
- 12V DC
- Dual Video Output
 - Analog Video Output (Selectable) – AHD / TVI / CVBS (960H)
 - Digital Serial Video Output - EX-SDI

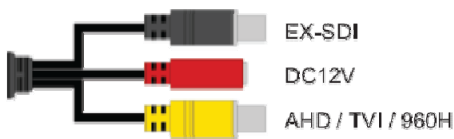

Dimensions:

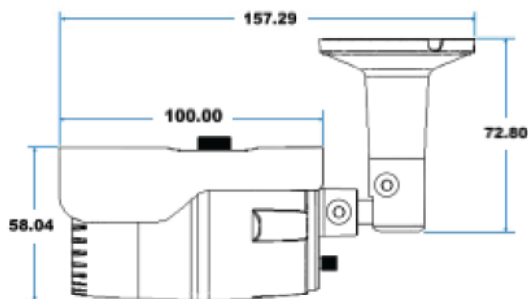

Design subject to change without notice.

Specifications:

Image Sensor	1/2.8" 5Mega CMOS Sensor
Total Pixels	2704 (H) x 2104 (V)
Effective	2616 (H) x 1964 (V)
Resolution	2560 x 1440 Pixels
S/N Ratio	More than 40dB (AGC off)
Min. Illumination	Color : 0.2 Lux (50IRE) / 0.05 Lux (15IRE) B/W : 0.05 Lux (50IRE) / 0.02 Lux (15IRE)
Frame	30fps QHD
Video Output	Dual Video Output : SDI and AHD (TVI / 960H)
Lens	3.6mm Fixed Lens
Day & Night	Auto / Color / B&W / External
High Speed Shutter	1/30 (1/25) ~ 1/30 Ksec
Backlight	Off / HLC / BLC / WDR
Highlight compensation (HLC)	Level Setting (0~20), Color
Back Light Compensation (BLC)	Off / On (Size, Position)
Wide Dynamic Range (WDR)	Line Mode (30fps) / Frame Mode (15fps) and ROI
Automatic Gain Control (AGC)	Level Setting (0~10)
Camera ID	Off / On (Letters A~Z, Numerals 0~9, Symbols)
Digital Noise Reduction (DNR)	2D + 3DNR, OFF / Low / Middle / High)
Motion Detection	Off / On
Privacy Mask	16 Areas (Off / On, Color, Position)
Sens-up	x2, x4, x8, x16, x32
Defog	Auto / Manual
Power Input	DC 12V ± 10%
Operation Temperature	-10°C ~ +50°C
Dimensions	71.50 mm (W) x 100 mm (H) x157.29 mm (D)
Weight	255g (approx 0.56 lbs)